

AMD | MDB SERIES

INSTALLATION INSTRUCTIONS



WARNING:


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing..
- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

TABLE OF CONTENTS

WHAT IS A NEMA "G" (GRID) FIXTURE?.....	1	INSTALLING SIDE LENS.....	2
NEMA TYPE "G" INSTALLATION.....	1	WIRING DESIGNATIONS.....	2
ORIENTATION OF FIXTURES WITH READING FUNCTION.....	1	TYPICAL WIRING DIAGRAM.....	3
REMOVING SIDE LENS.....	2		

WHAT IS A NEMA "G" (GRID) FIXTURE?

All Williams grid fixtures (NEMA Type "G") are designed to fit securely into a standard NEMA Type "G", 1" nominal T-bar system.

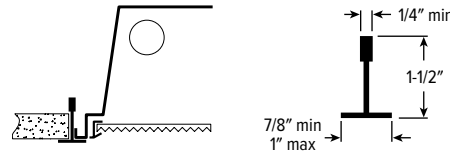

NEMA TYPE "G" INSTALLATION

- STEP 1:** Follow the steps below to install the fixture(s) into a NEMA Type "G" ceiling system:
- Raise the fixture through the ceiling opening and rest the fixture in the grid system.
 - Center the fixture within the opening.
 - Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
 - Refer to local codes for other installation requirements.
- STEP 2:** Once the fixture is installed into the ceiling system, follow the steps below to complete necessary electrical connections per NEC and all applicable local electrical codes. See "TYPICAL WIRING DIAGRAM" on page 3.
- Remove access plate on the back of the fixture.
 - Remove driver/power supply wires from access plate.
 - Make wire connections in accordance with local codes. Ground screw is provided on access plate.
 - Re-install access plate.

ORIENTATION OF FIXTURES WITH READING FUNCTION


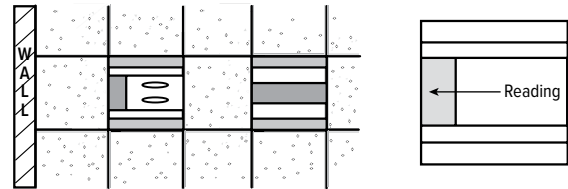


FIG 2.1

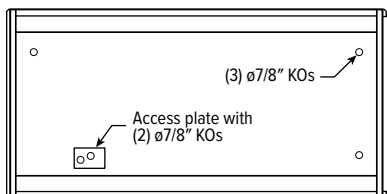

NOTE: Refer to individual product specification sheets for further information.


AMD | MDB SERIES

INSTALLATION INSTRUCTIONS

REMOVING SIDE LENS

STEP 3: Starting at one end, push edge of lens in with fingers and pull downward (FIG 3.1). Repeat process along length of fixture.


FIG 3.1

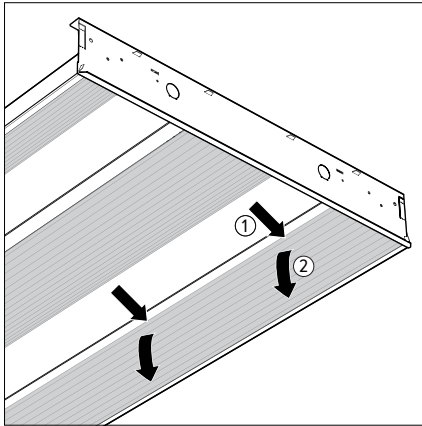

INSTALLING SIDE LENS


STEP 4: To install side lens, place straight edge of lens in corner of fixture (FIG 4.1).

FIG 4.1

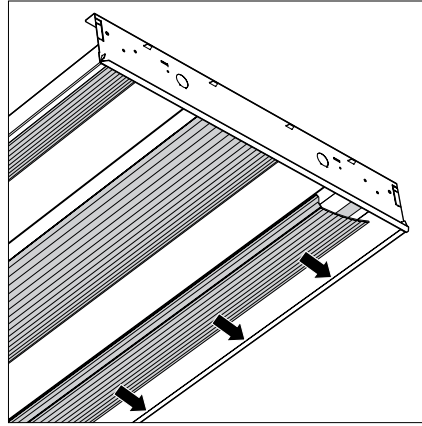

STEP 5: Rotate into position (FIG 5.1). Push on lens until it snaps into place. Do not force lens beyond this position.

FIG 5.1

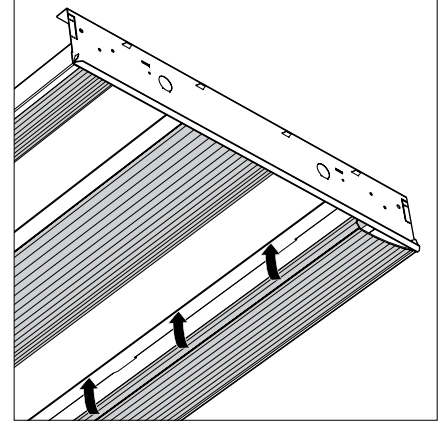

WIRING DESIGNATIONS

LINE VOLTAGE WIRING DESIGNATIONS

- Low Voltage Relay Supply (unswitched line voltage supply)
- Exam
- Nurse Light
- Ambient
- Reading
- Emergency (unswitched line volt supply)
- Green - Ground
- White - Common for all line voltage supply leads.

Line voltage supply wires for each appropriate lighting aperture. (These are power supply wires which are not being controlled through a low voltage controller inside the fixture and that require switching external to the fixture.)

LOW VOLTAGE DESIGNATIONS

Connect 'Low Voltage Commons' with each of the 'Low Voltage' wires as labeled below using a dry contact, normally open switch.

- Low Voltage Common
- Low Voltage Ambient
- Low Voltage Reading
- Low Voltage Nurse
- Low Voltage Exam

Fixture may not be equipped with all of these low voltage functions.

LOW-VOLTAGE CONTROLLER

EXAMPLE: LVC3A/R/N					
CONTROLLER	LOAD 1		LOAD 2		LOAD 3
LVC1 1-circuit	A	Ambient			
	N	Nurse			
	R	Reading			
	E	Exam			
LVC2 2-circuit	A/ R/	Ambient Reading	A	Ambient	
			N	Nurse	
			R	Reading	
			E	Exam	
LVC3 3-circuit or Dimming control	A/ R/ DIMA/ DIMR/	Ambient Reading Ambient, 0-10 dimming ¹ Reading, 0-10 dimming ¹	A/ N/ R/ E/	Ambient Nurse Reading Exam	N E Nurse Exam
	DIMA/DIMR/ Ambient and reading, 0-10 dimming ¹				
	SEQAR/ Ambient and reading, sequential switching ²				


¹ Smooth dimming of the load utilizing a single, dry contact, momentary, normally open switch which will dim from 25% up to 100% while holding down the switch.

² Alternating off and on of (2) loads with multiple cycles of one switch.

AMD | MDB SERIES

INSTALLATION INSTRUCTIONS

TYPICAL WIRING DIAGRAM

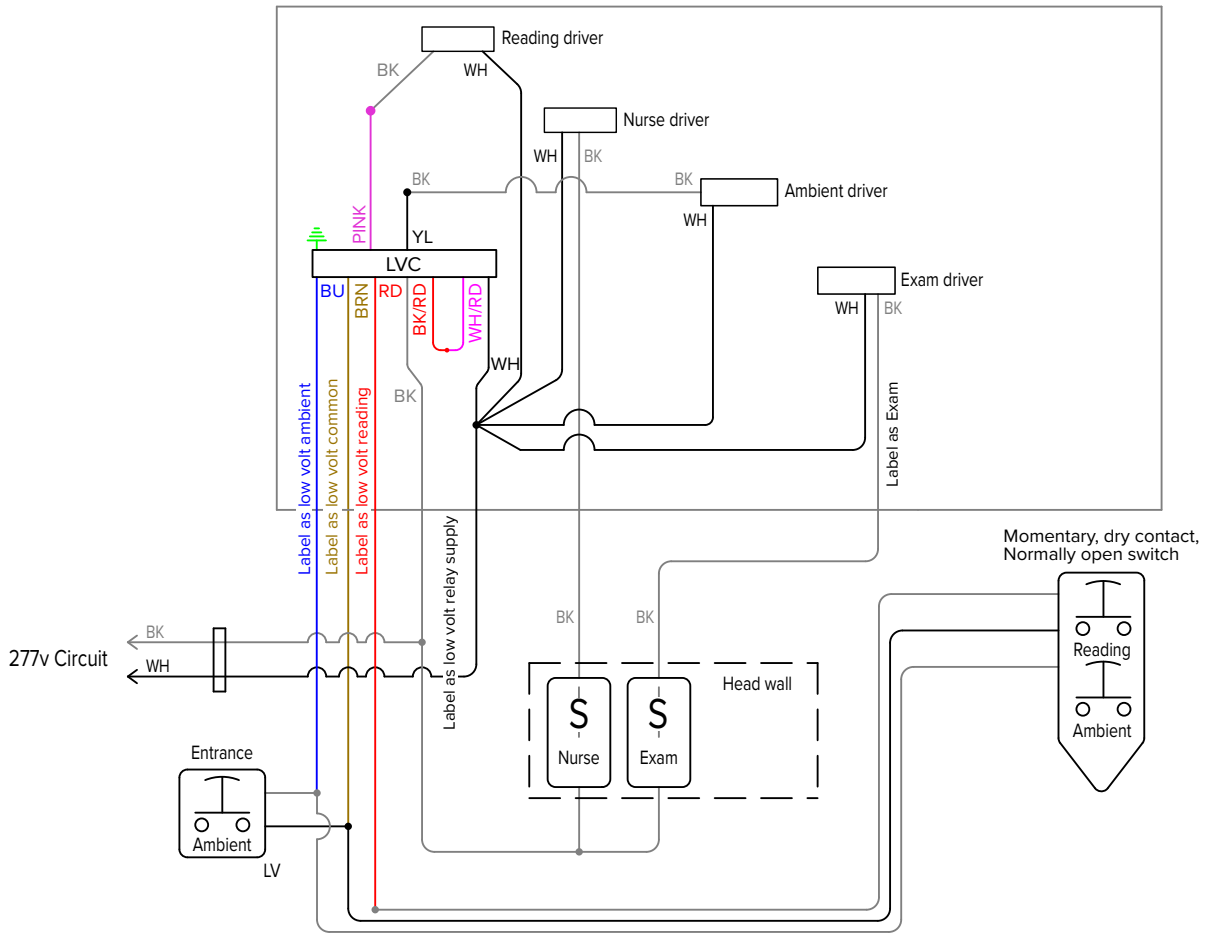

WIRING DIAGRAM DEPICTS:

1. Remote switch for control of ambient lighting
2. Remote switch for control of reading lamp
3. Entry (wall) switching of ambient lighting
4. Line voltage head wall switching of exam & nurse lighting