


### Warning:

- Caution - Risk of Shock. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- Warning Risk of Electrical Shock - Verify that supply voltage is correct by comparing it with the luminaire label information.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- Always use correct lamp type and wattages.


### LED Products Only:

- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.


1. Remove lens as shown (be sure to do so according to correct fixture style).

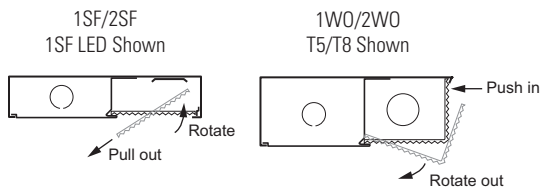

2. Using supplied keyhole slots, mount the fixture in the desired orientation.

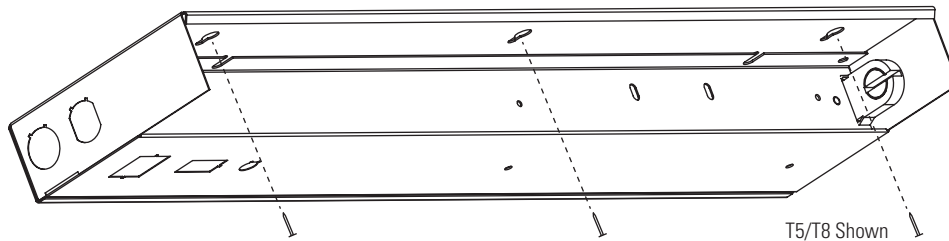

3. Access the wiring by removing (2) palnuts as shown and hinging the wireway down.

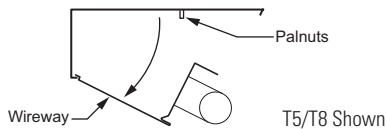

4. Connect wiring through one of the provided KO's in accordance with local codes.

5. Reverse steps 3 and 1 to replace wireway and lens.

**NOTE:** For T5/T8 fixtures utilizing Emergency battery packs, which must be remote mounted, mount the remote ballast box so that the flex between the box and fixture does not exceed 3' in length. Make connections to fixture by matching the labeled wires (1, 2, 3, etc...).