

# PT

## Shallow Plenum LED Troffer

The PT Series is the perfect LED solution for shallow plenum applications:

- ✓ Slim 2-3/8" depth
- ✓ Room-side access
- ✓ Uniform ambient illumination
- ✓ Companion retrofit kit

A Visible Difference®




H.E. WILLIAMS, INC.

## 3 SIZES




1x4

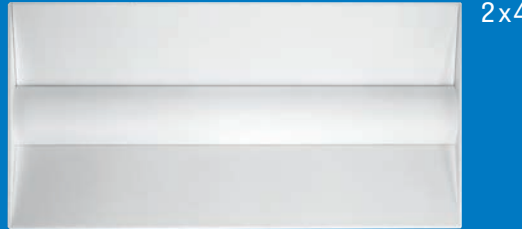

2x4



2x2

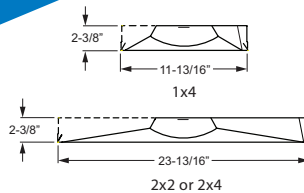

## FEATURES

- Easily change the color temperature on-site with fieldseleCCT™ technology
- Simple and attractive design
- Shallow housing depth for limited plenum space
- Access to the electrical from room-side of fixture
- Ribbed lens for enhanced visual comfort
- Surface mount and retrofit kit available
- Average efficacy >100 lm/W
- L70 >50,000 hours
- Heavy duty C.R.S. construction.
- Painted after fabrication for easy-to-handle edges
- 5-year limited warranty
- DLC qualified products listed at [designlights.org/qpl](http://designlights.org/qpl)
- Proudly made in the USA

## ORDERING INFORMATION

EXAMPLE

**PT - 2 4 - L90/835 - RA - OPTIONS - DIM - UNV**

SERIES    NOM. W.    NOM. L.    LUMEN PACKAGE    CRI & CCT    SHIELDING    OPTIONS    DRIVER    VOLTAGE

Available with  
**fieldseleCCT**<sup>®</sup>  
see [hew.com](http://hew.com)



### SERIES

For PTR and PTS ordering information, see [www.hew.com](http://www.hew.com)  
**PT** Shallow Plenum LED Troffer

### NOMINAL WIDTH

**1** 1' (4' length only)  
**2** 2'

### NOMINAL LENGTH

**2** 2' (2' width only)  
**4** 4'

### LED PACKAGE

		EXAMPLE: L90/835			AVERAGE WATTAGE
		LUMEN PACKAGE	NOMINAL LUMENS	MINIMUM CRI & CCT	
1x4	<b>L27</b>		2700	<b>827</b> = 2700K <b>830</b> = 3000K <b>835</b> = 3500K <b>840</b> = 4000K <b>850</b> = 5000K	21
	<b>L45</b>		4500		34
	<b>L61</b>		6100		49
	<b>L26</b>		2600		21
2x2	<b>L43</b>		4300	<b>All</b> = 82 CRI	35
	<b>L52</b>		5200		43
	<b>L38</b>		3800		31
2x4	<b>L49</b>		4900	<b>All</b> = 82 CRI	37
	<b>L61</b>		6100		49
	<b>L90</b>		9000		71

Nominal lumen output based on 3500 CCT. Actual lumens may vary +/-5%. See specification sheet for fixture performance data. Additional LED lumen packages available, see options.

### SHIELDING

**RA** Diffuse ribbed acrylic

### OPTIONS

**EM/10W** 10-watt emergency driver (120-277V only; 2x2 & 2x4 only)  
**EM/10WLP** Low-profile 10-watt emergency driver (120-277V only; 1x4 only)  
**EQCLIPS (L\_\_)** Earthquake clips (4 per fixture)  
Additional lower lumen packages available. Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package **Example:** 8,000 nom. lumens = PT-24-L90/840-(L80)  
**CP** Chicago plenum (CCEA)  
**AMW** Anti-microbial white finish

### ACCESSORIES (Shipped Separately)

**DFK-1248W** Drywall kit, 12" x 48", white  
**DFK-2424W** Drywall kit, 24" x 24", white  
**DFK-2448W** Drywall kit, 24" x 48", white

### DRIVER

Additional dimming drivers available, see [www.hew.com](http://www.hew.com)  
**DRV** Driver prewired for non-dimming applications  
**DIM** 10% dimming driver prewired for 0-10V low voltage applications

### VOLTAGE

**120** 120V  
**277** 277V  
**UNV** 120-277V  
**347** 347V



Surface Mount



Retrofit