

**\*\* Installation of these products should only be performed by a qualified electrician. \*\***

**Warnings:**

**Caution – Risk of Shock**


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- Always use correct lamp type and wattages.

**Important:** The length of wall brackets supplied for each straight run of fixtures is 6". Space brackets accordingly through out fixture length.


Number of brackets to be used per fixture:

- 2' - 4': Use (2) mounting brackets
- 6' - 10': Use (3) mounting brackets
- 12'-16': Use (4) mounting brackets


**Step 1:** Securely mount wall brackets (according to code) to wall (Fig. 1). **Note:** Brackets must be level and plumb.

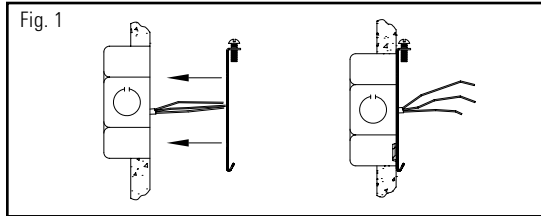

**Step 2:** Remove screws from reflector, then pull reflector and wireway cover forward. (Fig. 2).

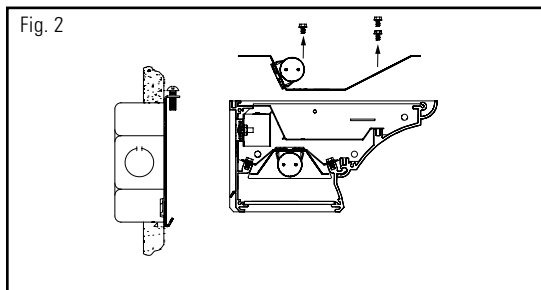

**Step 3:** Feed power through  $\phi 7/8$ " hole in the back of the fixture, then install the fixture on the wall bracket. (Fig. 3).

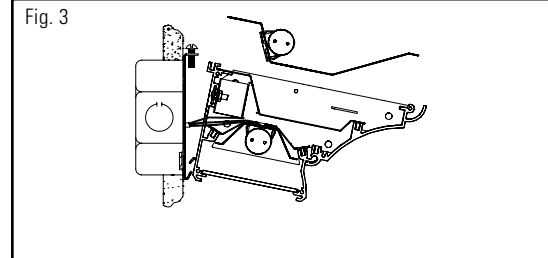

**Step 4:** Tighten screws on the top of the wall bracket to secure the fixture (Fig. 4). Connect power feed. Reinstall reflector and wireway cover.

