

LED EXIT SIGN

EXIT

LED

CATALOG #:

TYPE:

PROJECT:


NOTES:

EXAMPLE → **EXIT - R - EM - WHT - OPTIONS**

SERIES LETTER COLOR POWER OPTIONS HOUSING COLOR OPTIONS/ACCESSORIES



CROSS SECTIONS

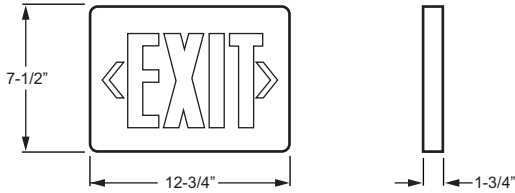

ORDERING INFORMATION

SERIES	
EXIT	LED Exit Sign
LETTER COLOR (Must specify)	
R	Red
G	Green
POWER OPTIONS (Must specify)	
AC	AC operation
EM	AC operation with emergency battery backup

HOUSING COLOR (Must specify)	
WHT	Industry-standard white
BLK	Black
OPTIONS	
COPY/SF	Custom message (consult factory), single face
COPY/DF	Custom message (consult factory), double face
SALIDA	Salida faceplate (industry-standard white only)
DC	Dual circuit (AC only)
SDT	Self-diagnostic test (EM only)
SV__	Special voltage, consult factory for options

ACCESSORIES (Shipped separately)	
See back for details.	
PC1	Polycarbonate shield
WG	Wireguard

FEATURES

- ▶ Compact, low-profile design
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Provided as universal single face/double face unit.
- ▶ Removable directional indicators.
- ▶ Custom messages available, consult factory for details.



LED

ELECTRICAL INFORMATION

SPECIFICATIONS

Housing – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Universal mounting canopy for top or side installation.

Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT	3.8	3.8	0.034	0.020

ACCESSORIES

PC1	WG
