

# LED EXIT & EMERGENCY LIGHT

# EXIT/EM

CATALOG #: \_\_\_\_\_ TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_


NOTES: \_\_\_\_\_

**EXAMPLE** → **EXIT/EM - R - WHT - OPTIONS - D**

SERIES      LETTER COLOR      HOUSING COLOR      OPTIONS/ACCESSORIES      VOLTAGE



## CROSS SECTIONS

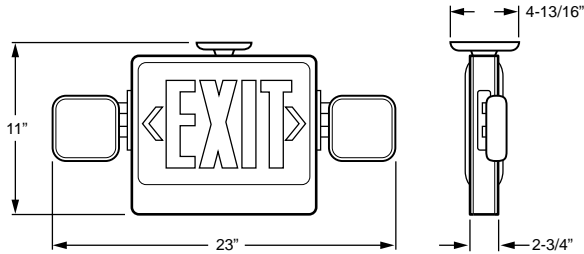

## ORDERING INFORMATION

**SERIES**  
**EXIT/EM**      LED Exit & Emergency Light

**LETTER COLOR (Must specify)**  
**R**      Red  
**G**      Green

**HOUSING COLOR (Must specify)**  
**BLK**      Black  
**WHT**      Industry-standard white

**OPTIONS**  
**RC**      Remote capacity (not available with HTR option)  
**HTR**      Internal heater (not available with RC option)  
**SALIDA**      Salida faceplate  
**SDT**      Self-diagnostic test

**ACCESSORIES (Shipped separately)**  
 See back for details.  
 Additional remote heads available (RC only), see [Technical Info](#).  
**RH**      5.4-watt single remote head, industry-standard white (RC only)  
**DRH**      10.8-watt dual remote head, industry standard white (RC only)  
**PC4**      Polycarbonate shield  
**WG/COMBO**      Wireguard

**OPTIONS**  
**D**      120V or 277V  
**SV\_\_**      Special voltage, consult factory for options (not available with SDT)

## FEATURES

- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ 6-volt, sealed lead acid, maintenance-free battery provides 90 minutes of emergency operation.
- ▶ Automatic, low voltage disconnect (LVD) activates unit in event of partial power failure or brownout.
- ▶ Removable directional indicators.
- ▶ Charge rate/power on LED indicator and built-in test switch.
- ▶ Fully automatic solid-state system recharges battery in 24 hours.
- ▶ Smooth thermoplastic reflector and plastic lens for optimal light distribution.
- ▶ Available with industry-standard white or black housing.
- ▶ Unique design allows double face conversion in the field.
- ▶ Two fully-adjustable glare-free 5.4-watt incandescent lamp heads.



## SPECIFICATIONS

**Housing** – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic.

**Electrical** – Universal voltage, 120 or 277 VAC operation.

**Mounting** – Mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.



**Labels** – Listed to UL 924 standard as an emergency/exit light suitable for dry or damp locations (20°C - 40°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Warranty** – 5-year limited warranty

## ELECTRICAL INFORMATION

Catalog Number	Maximum Remote Capacity (W)	Input Watts (W)		Input Amps (A)	
		120V	277V	120V	277V
EXIT/EM	11	10	10	0.10	0.05

## ACCESSORIES

RH	DRH
	
PC4	WG/COMBO
