

EDGE-LIT LED EXIT SIGN

EXIT/EL

LED

CATALOG #:

TYPE:

PROJECT:

NOTES:

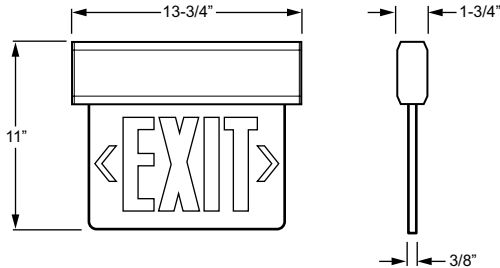
EXAMPLE

EXIT/EL - SF - R - CP - AN - AC - OPTIONS - D

SERIES NUMBER OF FACES LETTER COLOR FACEPLATE FINISH HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES VOLTAGE



CROSS SECTIONS



ORDERING INFORMATION

SERIES

EXIT/EL Edge-Lit LED Exit Sign

NUMBER OF FACES (Must specify)

SF Single face
DF Double face

LETTER COLOR (Must specify)

R Red
G Green

FACEPLATE FINISH (Must specify)

CP Clear panel (SF only)
MP Mirror panel
WP White panel

HOUSING COLOR (Must specify)

AN Anodized aluminum
BLK Black
WHT Industry-standard white

POWER OPTIONS (Must specify)

AC AC operation
EM AC operation with emergency battery backup

OPTIONS

COPY Consult factory for custom message
DC Dual circuit (AC only)
SDT Self-diagnostic test (EM only)

ACCESSORIES (Shipped separately)

See back for details.
PC2 Polycarbonate shield
WG Wireguard (wall mount only)

VOLTAGE

D 120V or 277V
SV__ Special voltage, consult factory for options (not available with SDT or DC)

FEATURES

- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Ceiling, side, or wall mount.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Compact, low profile design.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- ▶ Directional indicators can be installed on-site.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Custom messages available, consult factory for details.



LED

SPECIFICATIONS

Housing – Premium-grade extruded aluminum
Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Aluminum mounting canopy for ceiling, side, or wall mount installation.



Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/EL	3.8	4.5	0.030	0.020

ACCESSORIES

PC2	WG
	

FIXTURE DETAILS

Ceiling Mount	Side Mount	Wall Mount
