

# CAST ALUMINUM LED EXIT SIGN

# EXIT/CA

LED

CATALOG #: \_\_\_\_\_ TYPE: \_\_\_\_\_


PROJECT: \_\_\_\_\_ NOTES: \_\_\_\_\_

**EXAMPLE** → **EXIT/CA - R - AF - WHT - AC - OPTIONS - D**

SERIES      LETTER COLOR      FACEPLATE FINISH      HOUSING COLOR      POWER OPTIONS      OPTIONS/ACCESSORIES      VOLTAGE



## CROSS SECTIONS

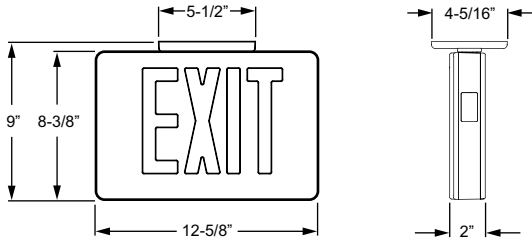

## ORDERING INFORMATION

**SERIES**  
**EXIT/CA** Cast Aluminum LED Exit Sign

**LETTER COLOR**  
**R** Red  
**G** Green

**FACEPLATE FINISH**  
**AF** Brushed aluminum faceplate  
**BF** Black faceplate  
**WF** Industry-standard white faceplate

**HOUSING COLOR**  
**BLK** Black  
**BA** Brushed aluminum  
**WHT** Industry-standard white

**POWER OPTIONS**  
**AC** AC operation  
**EM** AC operation with emergency battery backup

**OPTIONS**  
**DC** Dual circuit (AC only)  
**SDT** Self-diagnostic test (EM only)  
**TP** Tamper-resistant

**ACCESSORIES (Shipped separately)**  
 See back for details.  
**PC1** Polycarbonate shield  
**WG** Wireguard

**VOLTAGE**  
**D** 120V or 277V  
**SV\_\_** Special voltage, consult factory for options

## FEATURES

- ▶ Universal design allows for single and double face.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Fully automated solid-state, two-rate charger indicates battery charging to recharge a discharge battery in 24 hours.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Compact, low profile design.
- ▶ Field selectable knockout chevron directional indicators under the faceplate.

## LED

### SPECIFICATIONS

**Housing** – Premium-grade cast aluminum  
**Electrical** – Universal voltage, 120 or 277 VAC operation.

**Mounting** – Aluminum mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.


**Labels** – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Warranty** – 5-year limited warranty

### ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/CA-R-EM-DC-SDT	3.2	3.6	0.031	0.019
EXIT/CA-G-EM-DC-SDT	3.8	4.4	0.033	0.017

### ACCESSORIES

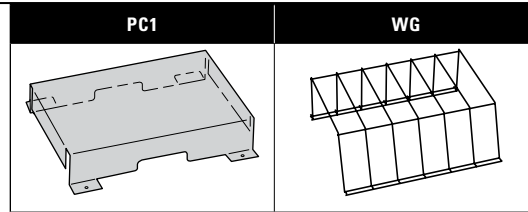

### BOLD CIRCLE PATTERN

