

CAST ALUMINUM LED EXIT SIGN

EXIT/CA

LED

CATALOG #: _____ TYPE: _____

PROJECT: _____


NOTES: _____

EXAMPLE → **EXIT/CA - R - AF - WHT - AC - OPTIONS**

SERIES LETTER COLOR FACEPLATE FINISH HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES



CROSS SECTIONS

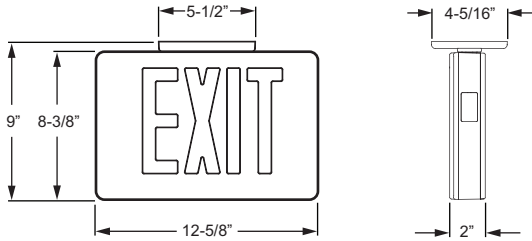

ORDERING INFORMATION

SERIES
EXIT/CA Cast Aluminum LED Exit Sign

LETTER COLOR
R Red
G Green

FACEPLATE FINISH
AF Brushed aluminum faceplate
BF Black faceplate
WF Industry-standard white faceplate

HOUSING COLOR
BLK Black
BA Brushed aluminum
WHT Industry-standard white

POWER OPTIONS
AC AC operation
EM AC operation with emergency battery backup

OPTIONS
DC Dual circuit (AC only)
SDT Self-diagnostic test (EM only)
TP Tamper-resistant
SV__ Special voltage, consult factory for options

ACCESSORIES (Shipped separately)
 See back for details.
PC1 Polycarbonate shield
WG Wireguard

FEATURES

- ▶ Universal design allows for single and double face.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Compact, low profile design.
- ▶ Removable directional indicators.

LED

SPECIFICATIONS

Housing – Premium-grade cast aluminum
Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Aluminum mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.


Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

| Catalog Number | Input Watts (W) | | Input Amps (A) | |
|---------------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| EXIT/CA-R-EM-DC-SDT | 3.2 | 3.6 | 0.031 | 0.019 |
| EXIT/CA-G-EM-DC-SDT | 3.8 | 4.4 | 0.033 | 0.017 |

ACCESSORIES

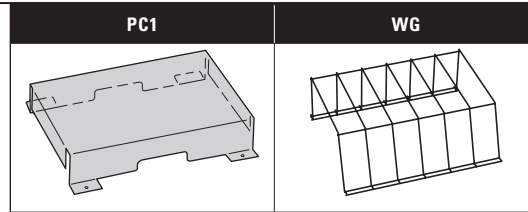

BOLD CIRCLE PATTERN

