

WET LOCATION EMERGENCY LIGHT

EMER/WET

CATALOG #: _____ TYPE: _____

PROJECT: _____


NOTES: _____

EXAMPLE → **EMER/WET** - **WHT** - **OPTIONS** - **D**

↓ SERIES
↓ HOUSING COLOR
↓ OPTIONS/ ACCESSORIES
↓ VOLTAGE



CROSS SECTIONS

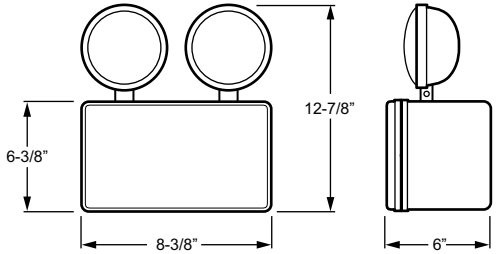

ORDERING INFORMATION

SERIES
EMER/WET Wet Location Emergency with Remote

HOUSING COLOR (Must specify)
WHT Industry-standard white

OPTIONS
HTR Internal heater
RC Remote capable

ACCESSORIES (Shipped separately)
 See back for details.
 Additional remote heads available, [see Technical Info.](#)
PC2 Polycarbonate shield
WETRH 7.2-watt wet location single remote head, industry-standard white (only available with RC option)
WETDRH 14.4-watt wet location dual remote head, industry-standard white (only available with RC option)

VOLTAGE
D 120V or 277V
SV__ Special voltage, consult factory for options

FEATURES

- ▶ Two 7.2-watt sealed and gasketed weather proof lamp heads with tempered glass lenses.
- ▶ Wet location listed.
- ▶ LVD (low voltage disconnect) prevents battery from deep discharge.
- ▶ 6-volt, sealed lead acid, maintenance-free battery provides 90 minutes of emergency operation.
- ▶ Fully automatic solid-state system recharges battery in 24 hours.
- ▶ Built-in sealed test switch.
- ▶ Charge rate/power on LED indicator light.
- ▶ Integral breather vent.
- ▶ Optional 15-watts of remote capacity.



SPECIFICATIONS

Housing – Corrosion-resistant 5VA flame retardant, UV-stabilized polycarbonate. Sealed and gasketed with hinged cover.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Wall mount.

Labels – Listed to UL 924 standard as an emergency light suitable for wet locations (5°C - 40°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

Catalog Number	Maximum Remote Capacity (W)	Input Watts (W)		Input Amps (A)	
		120V	277V	120V	277V
EMER/WET	15	8.5	10.0	0.073	0.040

ACCESSORIES

PC2	WETRH	WETDRH
