

RECESSED EMERGENCY LIGHT

EMER/RECESSED


CATALOG #:	TYPE:
PROJECT:	NOTES:

EXAMPLE → **EMER/RECESSED** - **WHT** - **OPTIONS** - **D**

SERIES HOUSING COLOR OPTIONS VOLTAGE



CROSS SECTIONS

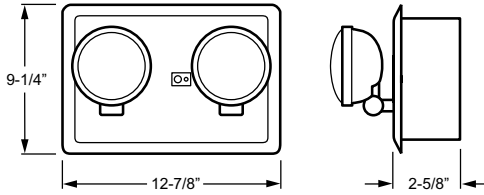

ORDERING INFORMATION

SERIES	
EMER/RECESSED	Recessed Emergency Light

HOUSING COLOR (Must specify)	
WHT	Industry standard white
BLK	Black

OPTIONS	
SDT	Self-diagnostic test

VOLTAGE	
D	120V or 277V
SV__	Special voltage, consult factory for options

FEATURES

- ▶ Compact, flush mount design.
- ▶ 6-volt, sealed lead acid, maintenance-free battery provides 90 minutes of emergency operation.
- ▶ Fully automatic solid-state system recharges battery in 24 hours.
- ▶ Automatic, low-voltage disconnect (LVD) activates unit in event of partial power failure or brownout.
- ▶ Mounting bar hangers included.
- ▶ Built-in test switch.
- ▶ Charge rate/power on LED indicator light.
- ▶ Two fully adjustable, glare-free 5.4-watt PAR-type lamp heads.
- ▶ High-performance chrome-plated metal reflectors and plastic lens for optimal light distribution.



ELECTRICAL INFORMATION

SPECIFICATIONS

Housing – Durable 20-gauge steel trim plate.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Recessed. Bar hangers on the back box. Compatible with drywall or drop ceiling mount installations.

Labels – Listed to UL 924 standard as an emergency light suitable for dry locations (25°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EMER/RECESSED	5.0	5.0	0.05	0.03