

# WET LOCATION LED EXIT & EMERGENCY LIGHT

# EXIT/EM/WET

CATALOG #: \_\_\_\_\_ TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_


NOTES: \_\_\_\_\_

**EXAMPLE** **EXIT/EM/WET - R - GRAY - OPTIONS - D**

SERIES      LETTER COLOR      HOUSING COLOR      OPTIONS/ACCESSORIES      VOLTAGE



## CROSS SECTIONS

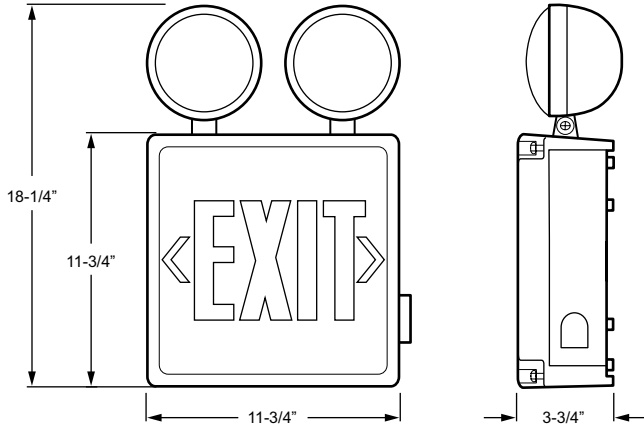

## FEATURES

- ▶ Wet location listed.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ High-performance reflector and tempered glass lens for optimal light distribution.
- ▶ 6V long-life, maintenance-free, NiCd battery provides 90 minutes of emergency operation.
- ▶ Fully automatic solid-state system recharges battery in 24 hours.
- ▶ Corrosion-resistant enclosure and engineering grade silicone gasket.
- ▶ Charge rate/power on LED indicator and built-in test switch.
- ▶ Two fully adjustable, glare-free 5.4-watt incandescent lamp heads.
- ▶ Removable directional indicators.

## ORDERING INFORMATION

### SERIES

**EXIT/EM/WET** Wet Location LED Exit & Emergency Light

### HOUSING COLOR (Must specify)

**GRAY** Gray

### LETTER COLOR (Must specify)

**R** Red  
**G** Green

### OPTIONS

**HTR** Internal heater  
**SALIDA** Salida faceplate, consult factory for options

### VOLTAGE

**D** 120V or 277V  
**SV\_\_** Special voltage, consult factory for options



## SPECIFICATIONS

**Housing** – 5VA flame retardant, UV-stabilized polycarbonate with high-impact resistant, UV-stabilized polycarbonate clear lens.

**Electrical** – Universal voltage, 120 or 277 VAC operation.

**Mounting** – Wall mount. Top and side knockouts for conduit feed applications.

**Labels** – Listed to UL 924 standard as an emergency/exit light suitable for wet locations. Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Warranty** – 5-year limited warranty

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/EM/WET	7.2	7.7	0.063	0.030

## FIXTURE DETAILS

### BOLT CIRCLE PATTERN

