


17" X 22" RECTANGULAR AREA LIGHT

OEZ1722



SUBMITTAL:

JOB:

TYPE:

VOLTAGE:

EXAMPLE:

OEZ1722 - 250PSMH120 - T3 - S - SQ - DBR - OPTIONS

SERIES

ELECTRICAL PACKAGE

DIST.

MOUNTING CONFIG.


MOUNTING POINT

FINISH OPTIONS

OPTIONS/ ACCESSORIES


SERIES

OEZ1722 — The OEZ Series features tool-less access to the reflector and a hinged, removable ballast tray for easy on-site maintenance.



FRONT VIEW

Single fixture, standard arm mount:
EPA: 1.61/Weight: 35 Lbs.

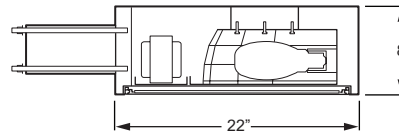

SIDE VIEW

OEZ1722 SERIES

HOUSING — Fabricated .080" aluminum, internally welded for strength and appearance.

DOOR — Extruded aluminum frame with mitered corners, stainless steel hinges and slide-action latches to provide easy access to ballast, lamp and reflector. Clear anodized finish.

LENS — Clear, .187" thick high-impact, heat-resistant tempered glass, secured with spring-tension glass clips, sealed with silicone.

ELECTRICAL PACKAGE (Must specify)

PULSE START METAL HALIDE

Lamp:	E17	BT28
Socket:	E26 Medium	E39 Mogul
ANSI Ballast Code:	M90	M153
	100PSMH120	250PSMH120
	100PSMH208	250PSMH208
	100PSMH240	250PSMH240
	100PSMH277	250PSMH277
	100PSMH347	250PSMH347
	100PSMH480	250PSMH480

HIGH PRESSURE SODIUM

Lamp:	E17	ET18
Socket:	E26 Medium	E39 Mogul
ANSI Ballast Code:	S55	S50
	150HPS120	250HPS120
	150HPS208	250HPS208
	150HPS240	250HPS240
	150HPS277	250HPS277
	150HPS347	250HPS347
	150HPS480	250HPS480

ELECTRICAL PACKAGE

PSMH — Rated -20°F minimum starting temperature.

HPS — Rated -40°F minimum starting temperature.

All PSMH and HPS electrical packages include porcelain socket. Core and coil ballast mounted on removable ballast tray. Prewired at factory to a disconnect plug for easy field installation. HX-HPF or CWA ballast type standard. Lamp is optional, please specify when ordering.




REFLECTOR

Tool-less access to the segmented, 95% reflective highly specular aluminum reflector in a high-reflectance white frame. Secured with thumb screws, the reflector can be rotated in 90° increments allowing orientation to be altered on-site.

MOUNTING

Extruded aluminum rectangular arm mount (standard).



DISTRIBUTION (Must specify)



T2
Type II



T3
Type III



TFT
Type forward throw



T5
Type V

MOUNTING CONFIGURATION (Must specify)

(EPA shown for arm mount noted below)



S Single
EPA: 1.61
8" Arm



D90 Double 90°
EPA: 2.94
11" Arm



D180 Double 180°
EPA: 3.22
8" Arm



T90 Triple 90°
EPA: 4.04
11" Arm



T120 Triple 120°
EPA: 3.20
8" Arm
Round pole only



Q90 Quad 90°
EPA: 4.04
11" Arm

MOUNTING POINT (Must specify)

SQ Square pole mount (standard)

RSD¹ Round straight arm mount¹

TM Tenon mount (Pole top tenon mount must be ordered separately. For all tenon options see Pole Top Assemblies.)

WM² Wall mount²

¹ Pole top diameter must be specified at time of order. EXAMPLE: 3" Pole top diameter = RSD300.

² Must anchor to appropriate wall construction.

FINISH OPTIONS (Must specify)

BLK Black (RAL #9004)

GRN Green (RAL #6005)

DBZ Dark bronze

SLV Satin aluminum (RAL #9006)

DBR Medium bronze

WHT White (RAL #9003)

GRAY Standard gray

RAL#_____ Specify custom color


OPTIONS

SF Single fuse (120V, 277V, or 347V only; must specify voltage)


DF Double fuse (208V, 240V, or 480V only; must specify voltage)

PC Factory-installed photocell (120V, 208V, or 277V only; must specify voltage)


ACCESSORIES



EHS 17-1/4" x 8-5/8" External house shield
EPA: 1.55/Weight: 1.8 Lbs.



DHS Door-mounted house shield



PVS Polycarbonate vandal shield
Weight: 3.2 Lbs.

LABELS

cCSAus certified as luminaire suitable for wet locations.