

DECORATIVE LED EMERGENCY LIGHT

EMER/DECO

CATALOG #:

TYPE:

PROJECT:


NOTES:

EXAMPLE → **EMER/DECO** - **DBR** - **OPTIONS** - **D**

SERIES HOUSING COLOR OPTIONS/ACCESSORIES VOLTAGE



CROSS SECTIONS

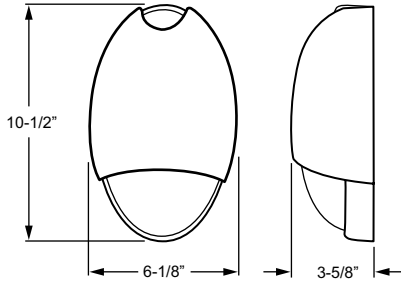

ORDERING INFORMATION

SERIES
EMER/DECO Decorative LED Emergency Light

OPTIONS
LT Low temperature (temperatures as low as -20°C - 40°C)

HOUSING COLOR (Must specify)
DBR Dark bronze (standard)
BLK Black
WHT White
NKL Nickel

VOLTAGE
D 120V or 227V

FEATURES

- ▶ Decorative, low-profile, architectural design.
- ▶ Factory-installed photocell included.
- ▶ Long-life, efficient ultra-bright 5-watt LED illumination.
- ▶ 4.8V long-life, maintenance-free NiCd battery provides 90 minutes of emergency operation.
- ▶ Fully automatic operation recharges battery in 24 hours.
- ▶ Built-in test switch.
- ▶ Charge rate/power on LED indicator light.
- ▶ Self-diagnostic testing standard.
- ▶ Prismatic polycarbonate refractor and mirror-bright reflector for maximum illumination.
- ▶ Standard operating temperature of 32°F to 122°F.
- ▶ Standard normally-on or normally-off and switched circuit.



SPECIFICATIONS

Housing – Powder coated finish on die-cast aluminum housing.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Wall or conduit entry through top.

Labels – Listed to UL 924 standard as an emergency light suitable for wet locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.


Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EMER/DECO	2.7	2.8	0.026	0.012
EMER/DECO-LT	2.9	3.0	0.031	0.014

FIXTURE DETAILS

BACKVIEW



BOLT CIRCLE PATTERN

