

# STEEL LED EXIT LIGHT

# EXIT/STEEL

LED

CATALOG #: \_\_\_\_\_ TYPE: \_\_\_\_\_


PROJECT: \_\_\_\_\_ NOTES: \_\_\_\_\_

**EXAMPLE** → **EXIT/STEEL** - **R** - **WHT** - **AC** - **OPTIONS** - **D**

SERIES                      LETTER COLOR                      HOUSING COLOR                      POWER OPTIONS                      OPTIONS/ ACCESSORIES                      VOLTAGE



## CROSS SECTIONS

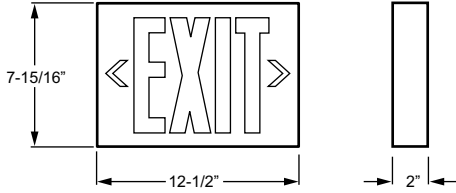

## ORDERING INFORMATION

### SERIES

**EXIT/STEEL** Steel LED Exit Sign

### LETTER COLOR (Must specify)

**R** Red  
**G** Green

### HOUSING COLOR (Must specify)

**BLK** Black  
**WHT** Industry-standard white

### POWER OPTIONS (Must specify)

**AC** AC operation  
**EM** AC operation with emergency battery backup

### OPTIONS

**SDT** Self-diagnostic test (EM only)

### ACCESSORIES (Shipped separately)

See back for details.  
**PC1** Polycarbonate shield  
**WG** Wireguard

### VOLTAGE

**D** 120V or 277V  
**SV\_\_** Special voltage, consult factory for options (not available with SDT)

## FEATURES

- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Unique design allows double face conversion in the field.
- ▶ Removable directional indicators.
- ▶ Available with industry-standard white or black housing.



## LED

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/STEEL	3.8	3.8	0.034	0.020

## SPECIFICATIONS

**Housing** – Durable, powder-coated 20-gauge steel construction.

**Electrical** – Universal voltage, 120 or 277 VAC operation.

**Mounting** – Mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.

**Labels** – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Warranty** – 5-year limited warranty

## ACCESSORIES

PC1	WG
