

CHICAGO-APPROVED LED EXIT LIGHT

EXIT/CHICAGO

CATALOG #:	TYPE:
PROJECT:	NOTES:


LED



EXAMPLE → **EXIT/CHICAGO - SF - AC - NA - OPTIONS - D**

SERIES NUMBER OF FACES POWER OPTIONS DIRECTIONAL ARROWS OPTIONS/ACCESSORIES VOLTAGE

CROSS SECTIONS

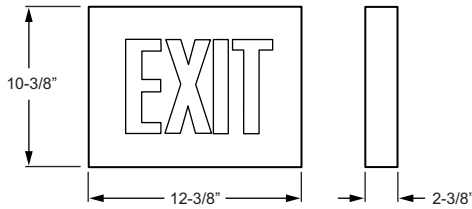

ORDERING INFORMATION

SERIES
EXIT/CHICAGO Chicago-Approved LED Exit Light

NUMBER OF FACES (Must specify)
SF Single face
DF Double face

POWER OPTIONS (Must specify)
AC AC operation (120V only)
EM AC operation with emergency battery backup (see back for details)

DIRECTIONAL ARROWS ¹ (Must specify)

See back for details

EXIT SIGNAGE
NA No arrows
DA Double arrows
RA Right arrow (single face only)
LA Left arrow (single face only)
LARA Left/Right arrow (double face only)

STAIR SIGNAGE
SWNA Stairs no arrow
SWDA Stairs double arrows
SWRA Stairs right arrow (single face only)
SWLA Stairs left arrow (single face only)
SWLARA Stairs left/right arrow (double face only)

ACCESSORIES (Shipped separately)

See back for details.
PC2 Polycarbonate shield
WG Wireguard

VOLTAGE

D 120V or 277V

FEATURES

- ▶ Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free, rechargeable Ni-Cd battery provides 120 minutes of emergency operation on EM units.
- ▶ Automatic, low voltage disconnect (LVD) activates EM unit in event of partial power failure or brownout.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Industry-standard white housing and red letters on white glass lens.
- ▶ Single or double face configurations.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.

¹ These units come standard with no directional arrows. If directional arrows are required for your application, it must be specified on all orders.



LED

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/CHICAGO	5.0	5.0	.10	.05

SPECIFICATIONS

Housing – Durable, powder-coated 20-gauge steel construction.

Lens – Open face glass panel with silk-screened letters.


Electrical – Universal voltage, 120 or 277 VAC operation (EM unit only). 120 volt, AC unit.

Mounting – Mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.


Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations. Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ACCESSORIES

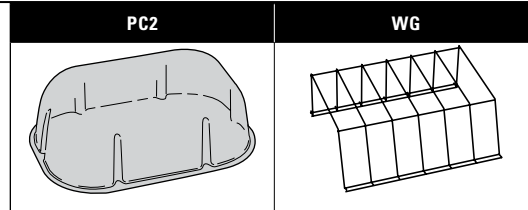

FIXTURE DETAILS

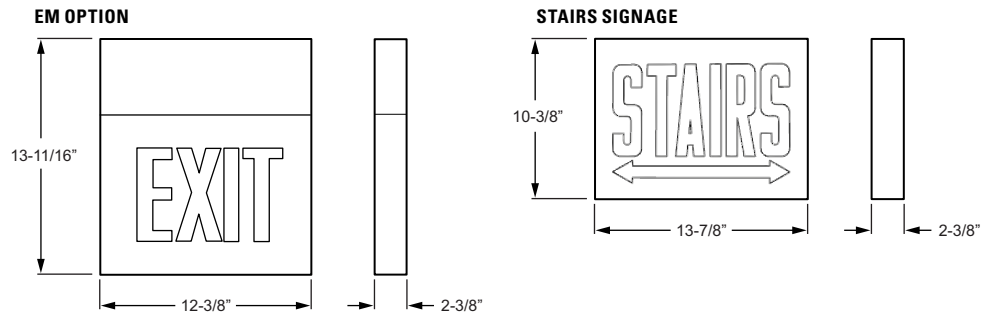

DIRECTIONAL ARROWS

