


Power Entry

Cord & Flexible Whips

CORD FOR SUSPENDED PRODUCT



EXAMPLE

S 48 3 8 / W

CORD TYPE LENGTH # OF WIRE COND. SIZE COLOR

CORD TYPE

S Straight

LENGTH

48 48"
96 96"

NUMBER OF CONDUCTORS

3 3 conductors
4 4 conductors
5 5 conductors

WIRE SIZE

4 No. 14 AWG
8 No. 18 AWG

COLOR

W White
B Black

ORDERING INFORMATION

| Designation | Description | Driver |
|-------------|-------------------------------------|-----------------------|
| S4838/W | 48" S/O Cord, (3) No. 18 conductors | DRV, LTE LINE |
| S4848/W | 48" S/O Cord, (4) No. 18 conductors | SD40, SD50 |
| S4858/W | 48" S/O Cord, (5) No. 18 conductors | DIM, DALI |
| S4848/W | 48" S/O Cord, (4) No. 18 conductors | DRV, LTE LINE with EM |
| S4858/W | 48" S/O Cord, (5) No. 18 conductors | SD40, SD50 with EM |
| | Consult Factory | DIM, DALI with EM |

FLEXIBLE WHIPS

All Williams recessed troffers are available with a flexible metallic wiring harness, factory-attached and hard-wired to the luminaire. See ordering information table.

Straight connectors are a snap-in type. Consult factory for wiring harness utilizing connectors secured by lock nuts, optional flex size, lengths, and other wire sizes or circuitry. Three-wire flex utilizes black, white, and green wire. Four-wire flex utilizes black, white, red, and green wire. On 3- or 4-lamp fixtures wired for multi-circuit inboard/outboard switching, outside lamps are wired to red circuit and inside lamp(s) are wired to black circuit. Adding an emergency option requires an additional wire.

Williams fixtures are UL listed to provide factory-installation of several manufacturers' modular wiring devices. Consult factory for availability and ordering information.


ORDERING INFORMATION

| Designation | Description | Driver |
|-------------|--|---------------|
| F338 | 6' of 3/8" flex, (3) No. 18 AWG wires with (2) straight connectors | DRV, LTE LINE |
| F348 | 6' of 3/8" flex, (4) No. 18 AWG wires with (2) straight connectors | SD40 |
| F334 | 6' of 3/8" flex, (3) No. 14 AWG wires with (2) straight connectors | DRV, LTE LINE |
| F344 | 6' of 3/8" flex, (4) No. 14 AWG wires with (2) straight connectors | SD40 |
| F358 | 6' of 3/8" flex, (5) #18 AWG wires with (2) straight connectors | DIM, DALI |

Cord Entry Diagrams

COVE LIGHTING


72
72LG
72SS6
CX

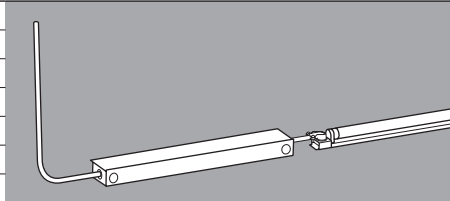

Note: Flex/Cord will mount in remote ballast box.


WALL | COVE

29 WMA
79BW
AIW
FPW
CB SMC
DB LPC
DC

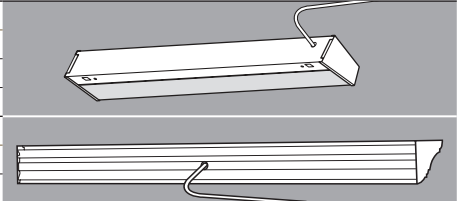

INDUSTRIAL


AL HL
FZL HL65
GL
GLA
GLN
GLS
GP

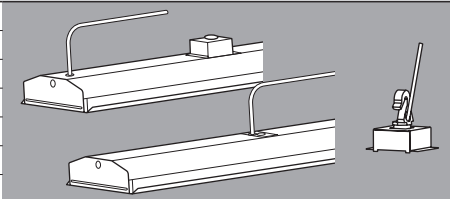

Note: Cord placement will be as shown. When "HUB/HOOK MT PACKED W/UNIT" is required the cord will be placed in the hook mount assembly as shown.


INDUSTRIAL

EGL TL12
92
93
95
96
97
TL

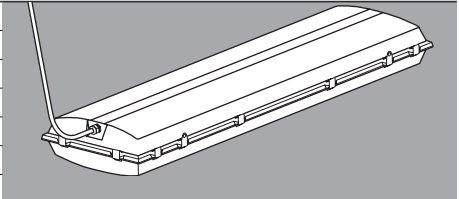


INDUSTRIAL WITH OCCUPANCY SENSOR

GL with OCC SENSOR
GLS with OCC SENSOR
FZL with OCC SENSOR
HL with OCC SENSOR

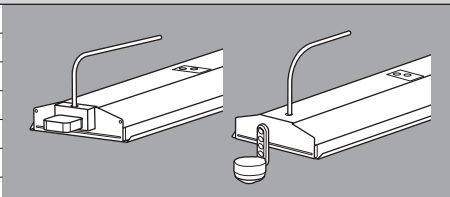

INDUSTRIAL | STRIPS

74T 84
76 85
77 88
78 GA
80 SLB
81
82

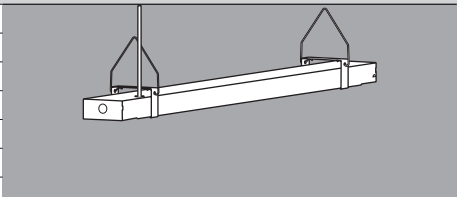

CONTINUED ON BACK




INFORMATION

Power Entry

Default Flex/Cord Locations (Continued)

RECESSED


| | | |
|---------|--------|-----|
| 50G | EFT | LT |
| AHT | EP | MD2 |
| AMD | EPW | MD4 |
| AT | HET 2' | MDB |
| BL | HETD | MDS |
| CDA | HETL | MM |
| CRV | HETW | SP |
| DIL | LP5 | VCL |
| DISH 4' | LL6 | |
| DT | LPT | |

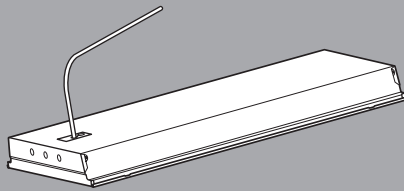

Note: Flex placement will be out access plate.


STRIPS | SUSPENDED

| | | |
|------|--------|-------|
| 73 | ST-AI5 | ST-PD |
| 74 | ST-CA | ST-SD |
| 75 | ST-CB | ST-WB |
| 75L | ST-DDI | |
| SDI4 | ST-DI | |
| SM73 | ST-DI2 | |
| SM75 | ST-HET | |

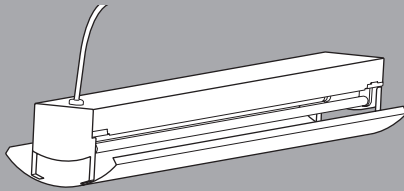


SURFACE MOUNT

| |
|------|
| DIS |
| HES |
| PTS |
| SLP5 |
| SPS |
| SU3 |

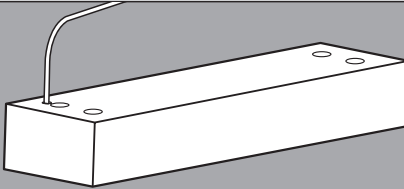


SURFACE MOUNT | WRAP AROUND

| | |
|----|------|
| 11 | 35 |
| 12 | 36 |
| 14 | 37 |
| 15 | 38 |
| 16 | 39 |
| 17 | 39W |
| 18 | 91 |
| 20 | AV8 |
| 21 | AV12 |
| 22 | AVX |
| 23 | CL |
| 24 | EW |
| 25 | WEW |
| 26 | SLF |
| 31 | STL |
| 32 | V5 |

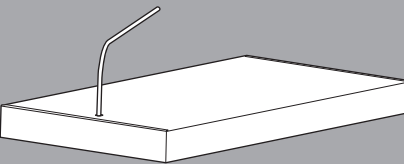

RECESSED | SURFACE MOUNT


| | |
|---------------|----|
| ASM | RW |
| DIA | |
| DIG | |
| DISH 2x2 | |
| DSP | |
| HE3 1x4 2x2 | |
| HET 1x2 1x4 | |
| PT | |
| RND | |

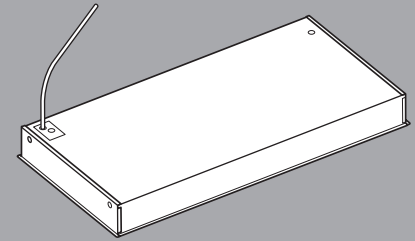

Note: Flex placement will be out access plate.


SURFACE MOUNT

| |
|-----|
| 1SF |
| 1WO |
| 2SF |
| 2WO |
| |
| |
| |

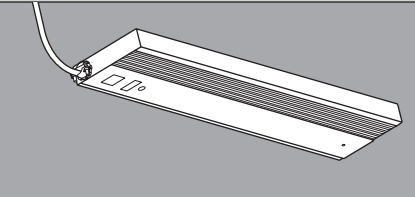


SURFACE MOUNT | INDUSTRIAL

| |
|-----------------|
| 91 (2' fixture) |
| DIS |
| LX4S |
| RNDS |
| SW |
| |
| |

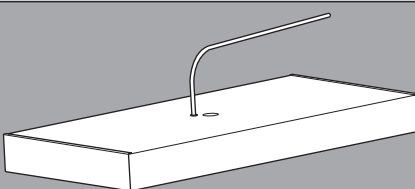


SUSPENDED

| | |
|------|------|
| 79B | SDI |
| AI3 | SDI2 |
| AI4 | SDI3 |
| FP | SIA1 |
| LLM | SIA2 |
| LX4D | SIA3 |
| LX4U | SDI5 |

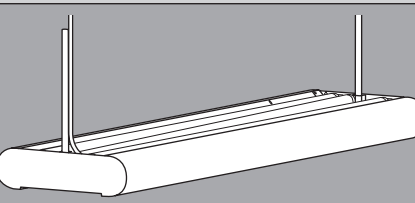


SUSPENDED

| |
|-----|
| 79 |
| AI5 |
| |
| |
| |

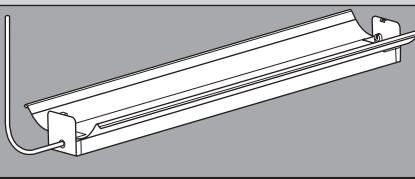

SUSPENDED

| |
|------|
| RNDP |
| |
| |
| |
| |

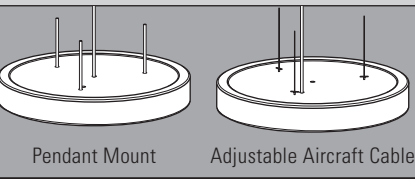

Pendant Mount

Adjustable Aircraft Cable