


Power Entry

Cord & Flexible Whips

CORD FOR SUSPENDED PRODUCT



EXAMPLE

S 48 3 8 / W
 CORD TYPE LENGTH # OF WIRE COND. SIZE COLOR

CORD TYPE

S Straight

LENGTH

48 48"
96 96"

NUMBER OF CONDUCTORS

3 3 conductors
4 4 conductors
5 5 conductors

WIRE SIZE

4 No. 14 AWG
8 No. 18 AWG

COLOR

W White
B Black

ORDERING INFORMATION

Designation	Description	Driver
S4838/W	48" S/O Cord, (3) No. 18 conductors	DRV, LTE LINE
S4848/W	48" S/O Cord, (4) No. 18 conductors	SD40, SD50
S4858/W	48" S/O Cord, (5) No. 18 conductors	DIM, DALI
S4848/W	48" S/O Cord, (4) No. 18 conductors	DRV, LTE LINE with EM
S4858/W	48" S/O Cord, (5) No. 18 conductors	SD40, SD50 with EM
	Consult Factory	DIM, DALI with EM

FLEXIBLE WHIPS

All Williams recessed troffers are available with a flexible metallic wiring harness, factory-attached and hard-wired to the luminaire. See ordering information table.

Straight connectors are a snap-in type. Consult factory for wiring harness utilizing connectors secured by lock nuts, optional flex size, lengths, and other wire sizes or circuitry. Three-wire flex utilizes black, white, and green wire. Four-wire flex utilizes black, white, red, and green wire. On 3- or 4-lamp fixtures wired for multi-circuit inboard/outboard switching, outside lamps are wired to red circuit and inside lamp(s) are wired to black circuit. Adding an emergency option requires an additional wire.

Williams fixtures are UL listed to provide factory-installation of several manufacturers' modular wiring devices. Consult factory for availability and ordering information.

ORDERING INFORMATION

Designation	Description	Driver
F338	6' of 3/8" flex, (3) No. 18 AWG wires with (2) straight connectors	DRV, LTE LINE
F348	6' of 3/8" flex, (4) No. 18 AWG wires with (2) straight connectors	SD40
F334	6' of 3/8" flex, (3) No. 14 AWG wires with (2) straight connectors	DRV, LTE LINE
F344	6' of 3/8" flex, (4) No. 14 AWG wires with (2) straight connectors	SD40
F358	6' of 3/8" flex, (5) #18 AWG wires with (2) straight connectors	DIM, DALI

Cord Entry Diagrams

COVE LIGHTING

72
72LG
72SS6
CX

Note: Flex/Cord will mount in remote ballast box.

WALL | COVE

29	WMA
79BW	
AIW	
FPW	
CB	SMC
DB	LPC
DC	

INDUSTRIAL

AL	HL
FZL	HL65
GL	
GLA	
GLN	
GLS	
GP	

Note: Cord placement will be as shown. When "HUB/HOOK MT PACKED W/UNIT" is required the cord will be placed in the hook mount assembly as shown.

INDUSTRIAL

EGL	TL12
92	
93	
95	
96	
97	
TL	

INDUSTRIAL WITH OCCUPANCY SENSOR

GL with OCC SENSOR
GLS with OCC SENSOR
FZL with OCC SENSOR
HL with OCC SENSOR

INDUSTRIAL STRIPS

74T	84
76	85
77	88
78	GA
80	SLB
81	
82	

CONTINUED ON BACK




INFORMATION

Power Entry


Default Flex/Cord Locations (Continued)

RECESSED		
50G	DT	LL6
AHT	EFT	LPT
AMD	EP	LT
AT	EPW	MD2
BL	HET 2'	MDB
CDA	HETD	MDS
CRV	HETL	MM
DIL	HETW	SP
DISH 4'	LP5	VCL

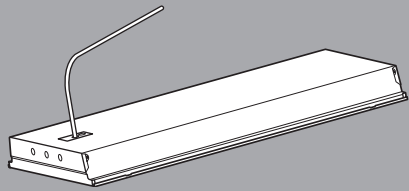


Note: Flex placement will be out access plate.

RECESSED	SURFACE MOUNT
ASM	RW
DIA	
DIG	
DISH 2x2	
DSP	
HE3 1x4 2x2	
HET 1x2 1x4	
PT	
RND	

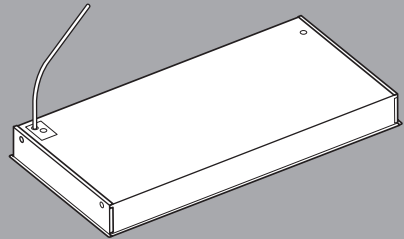


Note: Flex placement will be out access plate.


STRIPS	SUSPENDED	
73	ST-AI5	ST-PD
74	ST-CA	ST-SD
75	ST-CB	ST-WB
75L	ST-DDI	
SDI4	ST-DI	
SM73	ST-DI2	
SM75	ST-HET	

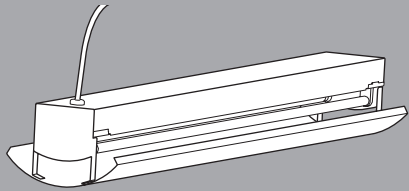


SURFACE MOUNT	
1SF	
1WO	
2SF	
2WO	

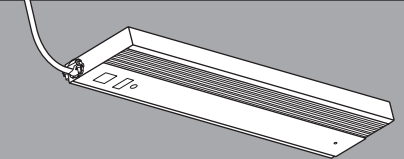


SURFACE MOUNT	
DIS	
HES	
SLP5	
SPS	
SU3	

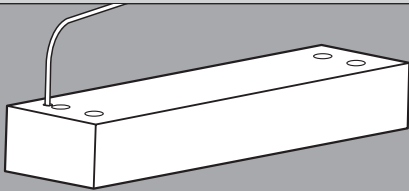


SURFACE MOUNT INDUSTRIAL	
91 (2' fixture)	
DIS	
LX4S	
RNDS	
SW	

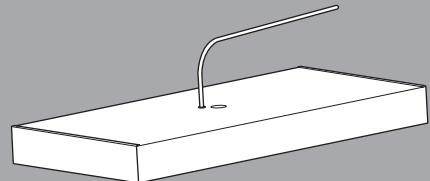


SURFACE MOUNT WRAP AROUND	
11	35
12	36
14	37
15	38
16	39
17	39W
18	91
20	AV8
21	AV12
22	AVX
23	CL
24	EW
25	WEW
26	SLF
31	STL
32	V5

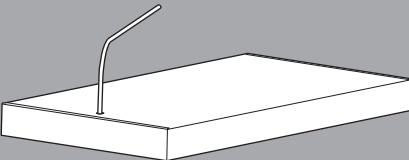


SUSPENDED	
79B	SDI
AI3	SDI2
AI4	SDI3
FP	SIA1
LLM	SIA2
LX4D	SIA3
LX4U	SDI5

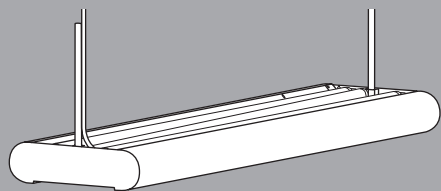

SUSPENDED	
79	
AI5	

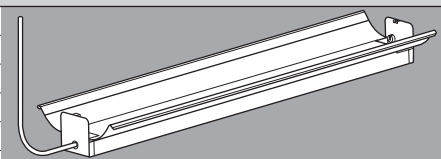

SUSPENDED	
RNDP	

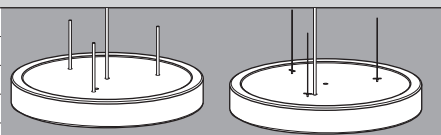

Pendant Mount Adjustable Aircraft Cable