


## Power Entry

### Cord & Flexible Whips

#### CORD FOR SUSPENDED PRODUCT



EXAMPLE

**S 48 3 8 / W**  
 CORD TYPE    LENGTH    # OF WIRE COND. SIZE    COLOR

#### CORD TYPE

**S** Straight

#### LENGTH

**48** 48"  
**96** 96"

#### NUMBER OF CONDUCTORS

**3** 3 conductors  
**4** 4 conductors  
**5** 5 conductors

#### WIRE SIZE

**4** No. 14 AWG  
**8** No. 18 AWG

#### COLOR

**W** White  
**B** Black

#### ORDERING INFORMATION

Designation	Description	Driver
S4838/W	48" S/O Cord, (3) No. 18 conductors	DRV, LTE LINE
S4848/W	48" S/O Cord, (4) No. 18 conductors	SD40, SD50
S4858/W	48" S/O Cord, (5) No. 18 conductors	DIM, DALI
S4848/W	48" S/O Cord, (4) No. 18 conductors	DRV, LTE LINE with EM
S4858/W	48" S/O Cord, (5) No. 18 conductors	SD40, SD50 with EM
	Consult Factory	DIM, DALI with EM

#### FLEXIBLE WHIPS

All Williams recessed troffers are available with a flexible metallic wiring harness, factory-attached and hard-wired to the luminaire. See ordering information table.

Straight connectors are a snap-in type. Consult factory for wiring harness utilizing connectors secured by lock nuts, optional flex size, lengths, and other wire sizes or circuitry. Three-wire flex utilizes black, white, and green wire. Four-wire flex utilizes black, white, red, and green wire. On 3- or 4-lamp fixtures wired for multi-circuit inboard/outboard switching, outside lamps are wired to red circuit and inside lamp(s) are wired to black circuit. Adding an emergency option requires an additional wire.

Williams fixtures are UL listed to provide factory-installation of several manufacturers' modular wiring devices. Consult factory for availability and ordering information.


#### ORDERING INFORMATION

Designation	Description	Driver
F338	6' of 3/8" flex, (3) No. 18 AWG wires with (2) straight connectors	DRV, LTE LINE
F348	6' of 3/8" flex, (4) No. 18 AWG wires with (2) straight connectors	SD40
F334	6' of 3/8" flex, (3) No. 14 AWG wires with (2) straight connectors	DRV, LTE LINE
F344	6' of 3/8" flex, (4) No. 14 AWG wires with (2) straight connectors	SD40
F358	6' of 3/8" flex, (5) #18 AWG wires with (2) straight connectors	DIM, DALI

### Cord Entry Diagrams

#### COVE LIGHTING


72  
 72LG  
 72SS6

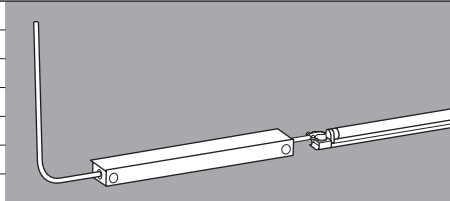

Note: Flex/Cord will mount in remote ballast box.


#### WALL | COVE

29 WMA  
 79BW  
 AIW  
 FPW  
 CB SMC  
 DB LPC  
 DC

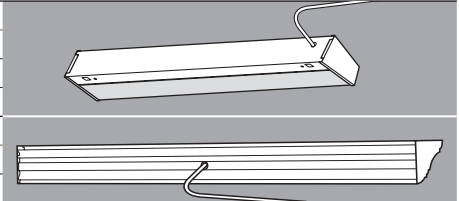

#### INDUSTRIAL


AL HL  
 FZL HL65  
 GL  
 GLA  
 GLN  
 GLS  
 GP

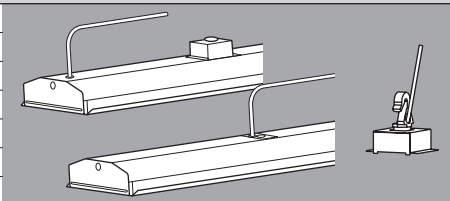

Note: Cord placement will be as shown. When "HUB/HOOK MT PACKED W/UNIT" is required the cord will be placed in the hook mount assembly as shown.


#### INDUSTRIAL

EGL TL12  
 92  
 93  
 95  
 96  
 97  
 TL

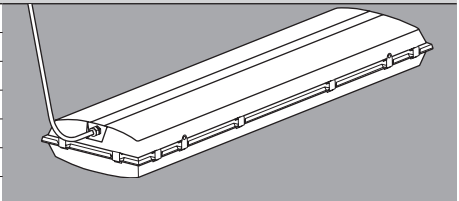


#### INDUSTRIAL WITH OCCUPANCY SENSOR

GL with OCC SENSOR  
 GLS with OCC SENSOR  
 FZL with OCC SENSOR  
 HL with OCC SENSOR

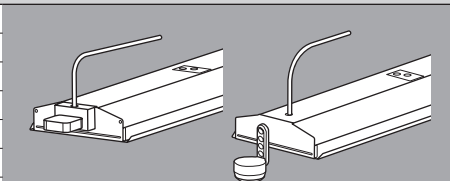

#### INDUSTRIAL | STRIPS

74T 84  
 76 85  
 77 88  
 78 GA  
 80 SLB  
 81  
 82

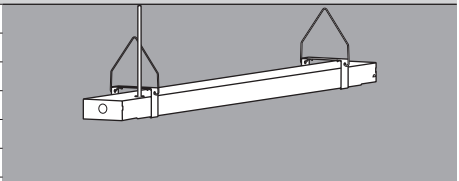

CONTINUED ON BACK




# INFORMATION

# Power Entry

## Default Flex/Cord Locations (Continued)

### RECESSED


50G	DT	LL6
AHT	EFT	LPT
AMD	EP	LT
AT	EPW	MD2
BL	HET 2'	MDB
CDA	HETD	MDS
CRV	HETL	MM
DIL	HETW	SP
DISH 4'	LP5	VCL

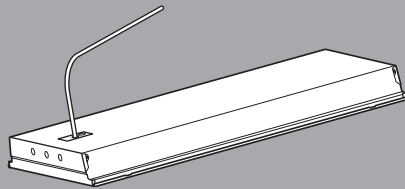

**Note:** Flex placement will be out access plate.

### RECESSED | SURFACE MOUNT


ASM	RW
DIA	
DIG	
DISH 2x2	
DSP	
HE3 1x4   2x2	
HET 1x2   1x4	
PT	
RND	

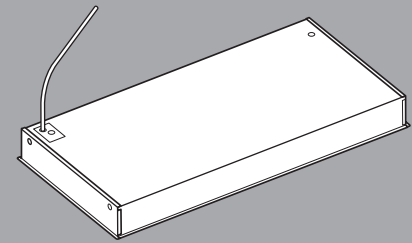

**Note:** Flex placement will be out access plate.


### STRIPS | SUSPENDED

73	ST-AI5	ST-PD
74	ST-CA	ST-SD
75	ST-CB	ST-WB
75L	ST-DDI	
SDI4	ST-DI	
SM73	ST-DI2	
SM75	ST-HET	

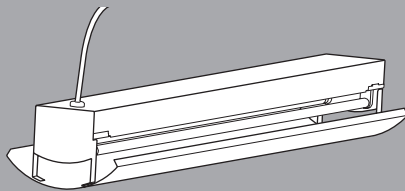


### SURFACE MOUNT

1SF
1WO
2SF
2WO

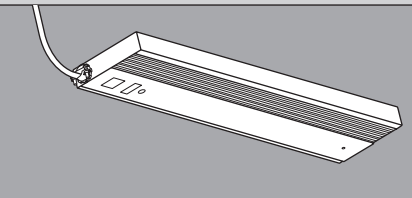


### SURFACE MOUNT

DIS
HES
SLP5
SPS
SU3

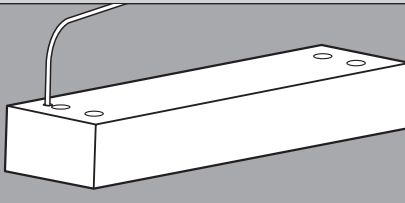


### SURFACE MOUNT | INDUSTRIAL

91 (2' fixture)
DIS
LX4S
RNDS
SW

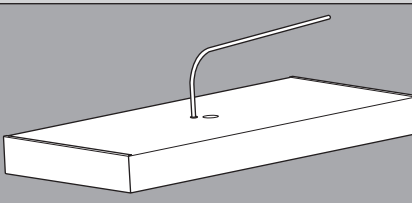


### SURFACE MOUNT | WRAP AROUND

11	35
12	36
14	37
15	38
16	39
17	39W
18	91
20	AV8
21	AV12
22	AVX
23	CL
24	EW
25	WEW
26	SLF
31	STL
32	V5

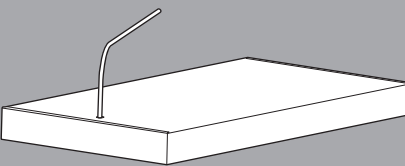


### SUSPENDED

79B	SDI
AI3	SDI2
AI4	SDI3
FP	SIA1
LLM	SIA2
LX4D	SIA3
LX4U	SDI5

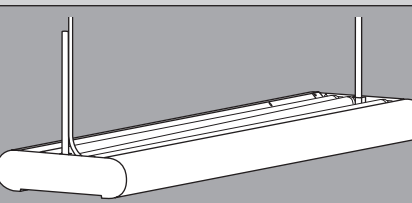


### SUSPENDED

79
AI5

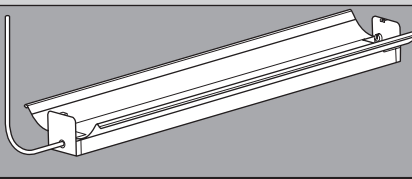

### SUSPENDED

RNDP

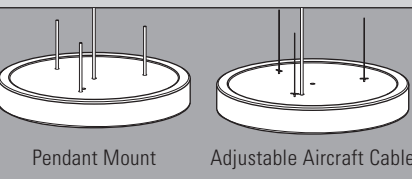

Pendant Mount

Adjustable Aircraft Cable