

COMPACT WET LOCATION LED EXIT SIGN

EXIT/WET/CP

CATALOG #:	TYPE:
PROJECT:	NOTES:


LED

EXAMPLE **EXIT/WET/CP - SF - R - WHT - AC - OPTIONS - D**

SERIES NUMBER OF FACES LETTER COLOR HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES VOLTAGE



CROSS SECTIONS

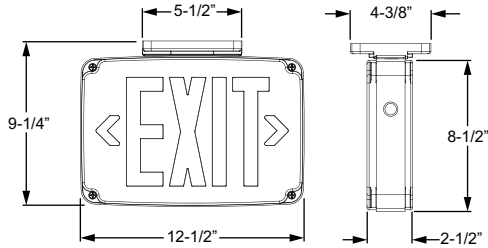

ORDERING INFORMATION

SERIES
EXIT/WET/CP Compact Wet Location LED Exit Sign

NUMBER OF FACES (Must specify)
SF Single face
DF Double face

LETTER COLOR (Must specify)
R Red
G Green

HOUSING COLOR (Must specify)
BLK Black
GRAY Gray with white faceplate
WHT Industry-standard white

POWER OPTIONS (Must specify)
AC AC operation
EM AC operation with emergency battery backup

OPTIONS
COPY/SF Custom message (consult factory), single face
COPY/DF Custom message (consult factory), double face
DC Dual circuit (AC only)
SDT Self-diagnostic test (EM only)
TP Tamper-resistant
SALIDA Salida faceplate, contact factory for options

ACCESSORIES (Shipped separately)
 See back for details.
PC2 Polycarbonate shield
WG Wireguard

VOLTAGE
D 120V or 277V
SV__ Special voltage, consult factory for options

FEATURES

- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Wet location listed.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Corrosion-resistant enclosure with engineering grade silicone gasket.
- ▶ Removable directional indicators.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Custom messages available, consult factory for details.

LED

SPECIFICATIONS

Housing – 5VA flame retardant, UV-stabilized polycarbonate. High-impact resistant, UV-stabilized polycarbonate clear lens.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Surface or wall mount. Polycarbonate mounting canopy for top or end mount.

Labels – Listed to UL 924 standard as an exit light suitable for wet locations (-20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/WET/CP	2.7	2.7	0.025	0.011
EXIT/WET/CP-EM-SDT	3.3	3.4	0.030	0.014
EXIT/WET/CP-DC	2.4	2.4	0.023	0.011

ACCESSORIES

PC2	WG
