

FIXTURE PERFORMANCE DATA

STANDARD

OPEN REFLECTOR TRIM TYPE

LED PACKAGE	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P13	W	1238	12.3	101.0
	M	1006	12.3	82.2
	N	992	12.3	81.0
P25	W	2306	25.0	92.2
	M	1875	25.0	75.0
	N	1849	25.0	74.0
P40	W	3725	37.5	99.3
	M	3026	37.5	80.7
	N	2909	37.5	77.6
P54	W	5029	50.0	100.6

TUNABLE WHITE

OPEN REFLECTOR TRIM TYPE

LED PACKAGE	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P13	W	1088	12.3	88.8
	M	881	12.3	71.9
	N	869	12.3	70.9
P25	W	2157	22.0	98.0
	M	1752	22.0	79.6
	N	1684	22.0	76.5
P40	W	3285	37.5	87.6
	M	2643	37.5	70.5
	N	2462	37.5	65.7
P54	W	3810	43.5	87.6

FLUSH LENS TRIM TYPE

LED PACKAGE	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P13	W	1317	12.3	107.5
	M	1349	12.3	110.1
	N	1314	12.3	107.3
P25	W	2454	25.0	98.2
	M	2515	25.0	100.6
	N	2449	25.0	98.0
P40	W	3965	37.5	105.7
	M	4057	37.5	108.2
	N	3851	37.5	102.7
P54	W	5353	50.0	107.1

FLUSH LENS TRIM TYPE

LED PACKAGE	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P13	W	1153	12.3	94.1
	M	1181	12.3	96.4
	N	1150	12.3	93.9
P25	W	2295	22.0	104.3
	M	2349	22.0	106.8
	N	2230	22.0	101.4
P40	W	3496	37.5	93.2
	M	3543	37.5	94.5
	N	3260	37.5	86.9
P54	W	4056	43.5	93.2

REGRESSED LENS TRIM TYPE

LED PACKAGE	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P13	W	1266	12.3	103.3
	M	1313	12.3	107.2
	N	1307	12.3	106.7
P25	W	2358	25.0	94.3
	M	2447	25.0	97.9
	N	2436	25.0	97.4
P40	W	3809	37.5	101.6
	M	3949	37.5	105.3
	N	3831	37.5	102.2
P54	W	5143	50.0	102.9

REGRESSED LENS TRIM TYPE


LED PACKAGE	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P13	W	1108	12.3	90.4
	M	1150	12.3	93.8
	N	1144	12.3	93.4
P25	W	2205	22.0	100.2
	M	2287	22.0	103.9
	N	2218	22.0	100.8
P40	W	3359	37.5	89.6
	M	3449	37.5	92.0
	N	3242	37.5	86.5
P54	W	3897	43.5	89.6

MULTIPLIER TABLES

STANDARD		
	CCT	LUMENS
80 CRI	2700K	0.95
	3000K	0.96
	3500K	1.00
	4000K	1.01
90 CRI	2700K	0.74
	3000K	0.85
	3500K	0.90
	4000K	0.91

TUNABLE WHITE		
	CCT	LUMENS
80 CRI	2700K	0.83
	3000K	1.00
	3500K	0.99
	4000K	1.00
	5000K	0.98

OPEN REFLECTOR FINISH		
CATALOG NUMBER	REFLECTOR FINISH	CONVERSION FACTOR
CS	Clear semi-specular	1.00
SG	Satin-glow	0.92
GD	Gold	0.93
CG	Champagne Gold	0.96
PW	Pewter	0.86
SPC	Specular	1.02
RG	Rose Gold	0.88
WH	White, textured	0.89
BL	Black, textured	0.79




- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Standard results based on 3500K/80 CRI, actual lumens may vary +/-5%
- Tunable white results based on 4000K/80 CRI, actual lumens may vary +/-5%
- Use multiplier tables to calculate additional options.



6DS PoE | tunable **WHITE** 6" Downlight – Square

PHOTOMETRY


6DS-P25/835-DIM-POE-LW-OF-WH Total Luminaire Output: 2454 lumens; 25.0 Watts | Efficacy: 98.2 lm/W | 83.5 CRI; 3456K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	1658	1658	1658	
5	1662	1654	1656	157
15	1624	1603	1603	453
25	1353	1492	1359	633
35	619	998	621	498
45	376	434	367	317
55	237	243	235	215
65	122	122	118	122
75	47	46	45	51
85	4	2	5	8
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1244	51
	0 - 40	1742	71
	0 - 60	2274	93
	0 - 90	2454	100
	0 - 180	2454	100


6DS-P25/835-DIM-POE-LM-OF-WH Total Luminaire Output: 2515 lumens; 25.0 Watts | Efficacy: 100.6 lm/W | 83.5 CRI; 3456K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	6881	6881	6881	
5	6551	6564	6607	595
15	3944	3901	3877	1062
25	1109	1097	949	540
35	251	284	202	176
45	64	92	73	68
55	42	42	39	39
65	25	23	24	24
75	11	8	10	11
85	0	0	0	1
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2197	87
	0 - 40	2372	94
	0 - 60	2479	99
	0 - 90	2515	100
	0 - 180	2515	100


6DS-P25/835-DIM-POE-LN-OF-WH Total Luminaire Output: 2449 lumens; 25.0 Watts | Efficacy: 98.0 lm/W | 83.5 CRI; 3456K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	9693	9693	9693	
5	8651	8779	8645	757
15	3722	3650	3471	1025
25	820	827	692	411
35	194	198	152	127
45	71	82	68	60
55	40	43	39	37
65	24	24	21	22
75	8	9	8	10
85	1	0	0	1
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2193	90
	0 - 40	2319	95
	0 - 60	2415	99
	0 - 90	2449	100
	0 - 180	2449	100

6DS-P25/835-DIM-POE-OWW-OF-CS Total Luminaire Output: 2198 lumens; 25.0 Watts | Efficacy: 87.9 lm/W | 83.5 CRI; 3456K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	2299	2299	2299	2299	2299	
5	2327	2302	2257	2251	2274	214
15	2011	1994	1958	1999	2006	553
25	1418	1437	1342	1433	1272	632
35	809	778	523	700	529	424
45	561	327	170	227	215	218
55	384	90	21	34	38	93
65	309	17	0	0	2	47
75	122	1	0	0	0	17
85	0	0	0	0	0	1
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1399	64
	0 - 40	1823	83
	0 - 60	2134	97
	0 - 90	2198	100
	0 - 180	2198	100



6DS PoE | tunable **WHITE** 6" Downlight – Square


6DS-P25/835-DIM-POE-OM-OF-CS Total Luminaire Output: 1875 lumens; 25.0 Watts | Efficacy: 75.0 lm/W | 83.5 CRI; 3456K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	2880	2880	2880	
5	2752	2750	2761	253
15	2022	2008	2026	562
25	1202	1184	1196	549
35	519	610	508	351
45	109	252	109	140
55	7	23	7	19
65	0	0	0	1
75	0	0	0	0
85	0	0	0	0
90	0	0	0	0

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1364	73
	0 - 40	1715	92
	0 - 60	1874	100
	0 - 90	1875	100
	0 - 180	1875	100


6DS-P25/835-DIM-POE-RM-OF-WH Total Luminaire Output: 2447 lumens; 25.0 Watts | Efficacy: 97.9 lm/W | 83.5 CRI; 3456K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	6247	6247	6247	
5	5922	5897	5946	534
15	3621	3574	3560	979
25	1212	1150	1070	568
35	331	353	271	219
45	94	111	76	81
55	40	44	38	39
65	20	17	17	19
75	5	6	6	7
85	0	0	0	1
90	0	0	0	0

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2081	85
	0 - 40	2300	94
	0 - 60	2420	99
	0 - 90	2447	100
	0 - 180	2447	100


TRIM TYPE DETAILS

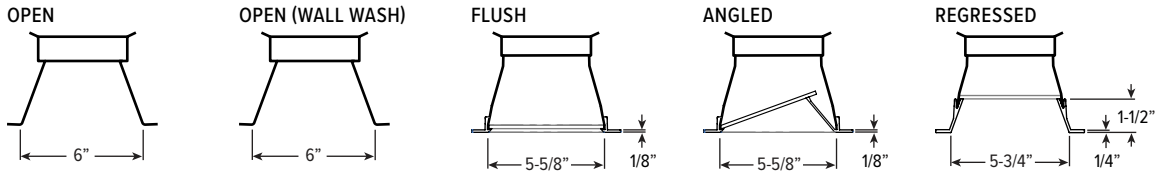

FLANGE TYPE DETAILS

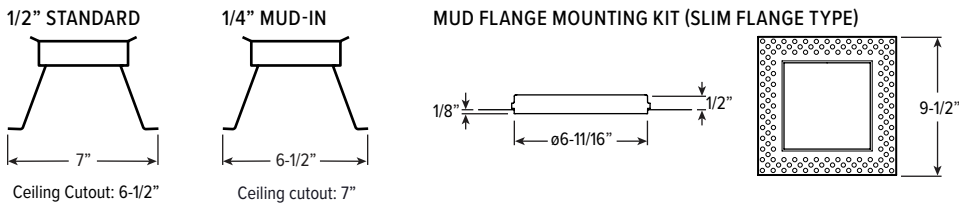


REFLECTOR FINISH DETAILS

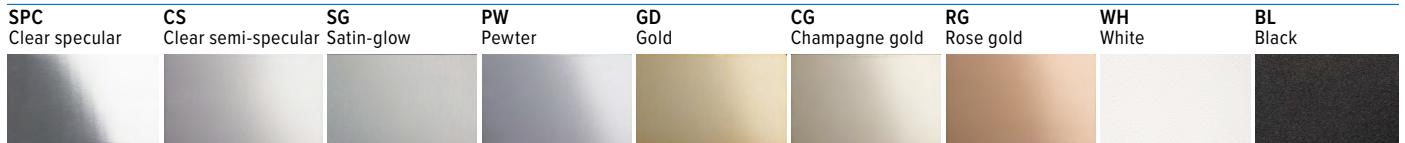


MOUNTING TYPE DETAILS


NEW CONSTRUCTION



IC-RATED




REMODEL

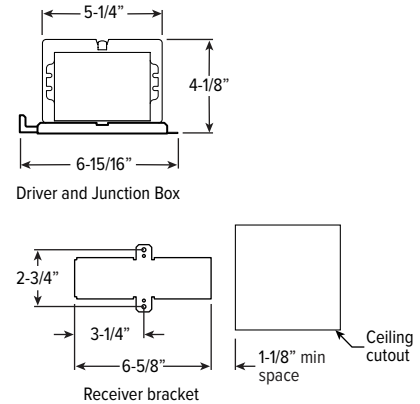


LUMENS	LENGTH			
	A	B	C	D
P13	15-3/16"	16"	6-3/8"	12-1/8"
P25	16-5/8"	17-1/2"	7-7/8"	14"

MOUNTING HARDWARE DETAILS


F1 2-Position fixed pan bracket, universal bar hanger included

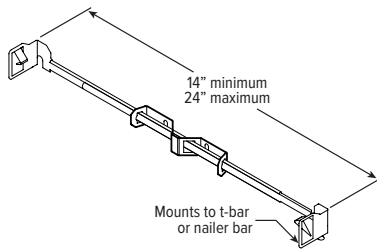


BA1 Adjustable butterfly pan bracket, bar hanger not included




CA1 Adjustable caterpillar pan bracket, universal bar hanger included

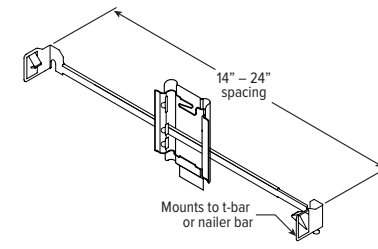

F2 2-Position fixed pan bracket, t-bar bar hanger included

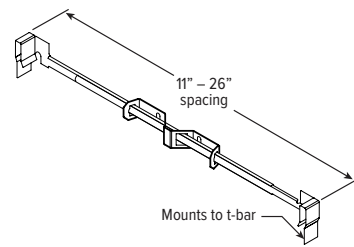

BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included

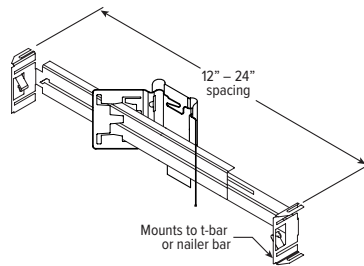

CA2 Adjustable caterpillar pan bracket, t-bar hanger included

