

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Slim 2-3/16" depth for shallow plenum applications
- Uniform ambient illumination
- Easy to install without the use of tools
- Seamless design prevents light leak
- Shipped in 2-packs to reduce job-site waste
- PMMA lens reduces the risk of yellowing from UV exposure
- Available on QuickShip for immediate project requirements

SPECIFICATIONS

- HOUSING – Seam-welded, precision die-formed aluminum.
- OPTICS – Edge-lit PMMA light guide panel.
- FINISH – Non-glare matte white polyester powder coat. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High quality mid-power LED boards. L80 >50,000 hours. -20°C minimum to 50°C maximum ambient operating temperature.
- MOUNTING – NEMA Type "G".
- LISTINGS –
 - CULUS listed as LED luminaire suitable for dry or damp locations.
 - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at www.designlights.org/QPL.
- WARRANTY – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: LP - 24 - L50/835 - OPTIONS - DIM - UNV

ORDERING INFO

SERIES	WIDTH	LENGTH	LUMENS ^[1]	CRI	CCT	OPTIONS
LP	1 1' ^[2]	2 2' ^[3]	1x4	8 80	35 3500K	EM/10WRM Remote mount 10-watt emergency battery ^[4]
	2 2'	4 4'	L40 4,000lm			
			2x2			DRYWALL FRAME-IN KITS ^[5] DFK-1248W Drywall kit, 12" x 48", white DFK-2424W Drywall kit, 24" x 24", white DFK-2448W Drywall kit, 24" x 48", white
			L40 4,000lm			
			2x4			
			L50 5,000lm			

DRIVER	VOLTAGE
DIM Dimming driver ^[6]	UNV 120-277V

QUICKSHIP 

- 1x4**
LP-14-L40/835-QS-DIM-UNV
LP-14-L40/840-QS-DIM-UNV
- 2x2**
LP-22-L40/835-QS-DIM-UNV
LP-22-L40/840-QS-DIM-UNV
- 2x4**
LP-24-L50/835-QS-DIM-UNV
LP-24-L50/840-QS-DIM-UNV



NOTES

- ¹ Nominal lumen output based on 3500 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
- ² 4' length only.
- ³ 2' width only.
- ⁴ Ships separately, field installed.
- ⁵ See technical info at hew.com for Drywall Kit details.
- ⁶ Dimming driver prewired for 0-10V low voltage applications.

FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
1x4	L40	4029	39.7	101.5
2x2	L40	4155	39.2	106.0
2x4	L50	4906	48.1	102.0


MULTIPLIER TABLE

COLOR TEMPERATURE	
CCT	CONVERSION FACTOR
3500K	1.00
4000K	1.03

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 3500K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

PHOTOMETRY


LP-14-L40-835-DIM-UNV Total Luminaire Output: 4029 lumens; 39.7 Watts | Efficacy: 101.5 lm/W



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1432	1432	1432	
	5	1433	1433	1433	136
	15	1379	1381	1384	388
	25	1271	1278	1282	584
	35	1101	1107	1114	695
	45	938	948	951	727
	55	719	720	725	646
	65	504	504	501	492
	75	261	255	257	278
	85	73	70	67	83
	90	5	6	5	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1108	28
	0 - 40	1803	45
	0 - 60	3175	79
	0 - 90	4029	100
	0 - 180	4029	100


LP-22-L40-835-DIM-UNV Total Luminaire Output: 4155 lumens; 39.2 Watts | Efficacy: 106.0 lm/W



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1463	1463	1463	
	5	1464	1457	1453	139
	15	1415	1406	1403	397
	25	1317	1310	1308	604
	35	1168	1163	1162	729
	45	987	977	980	756
	55	764	753	758	676
	65	517	514	507	507
	75	270	262	261	280
	85	53	47	48	67
	90	0	1	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1140	27
	0 - 40	1868	45
	0 - 60	3301	79
	0 - 90	4155	100
	0 - 180	4155	100


LP-24-L50-835-DIM-UNV Total Luminaire Output: 4906 lumens; 48.1 Watts | Efficacy: 102.0 lm/W




CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1732	1732	1732	
	5	1727	1724	1724	164
	15	1645	1648	1653	467
	25	1530	1539	1548	707
	35	1324	1338	1355	842
	45	1153	1170	1187	894
	55	879	891	903	794
	65	615	619	625	605
	75	315	313	313	336
	85	88	85	83	97
	90	7	5	5	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1338	27
	0 - 40	2180	44
	0 - 60	3868	79
	0 - 90	4906	100
	0 - 180	4906	100

BACK VIEW DETAILS

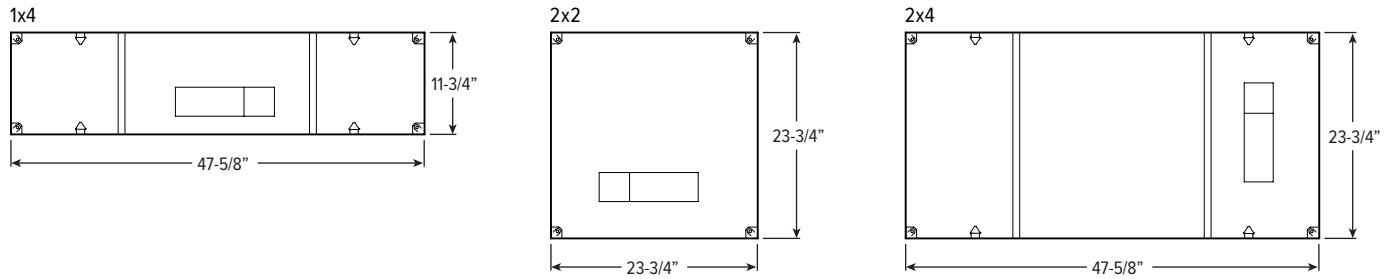

SIDE VIEW DETAILS

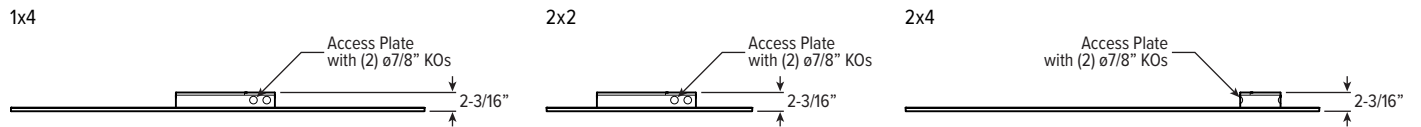

EM/10WRM DETAILS

