




Shown with lamps, not included



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Hinging/locking lamp brackets and factory-mounted, prewired sockets reduce installation time
- Available in 4' and 8' lengths
- Channel connector furnished for continuous row applications (included with 8' units only)
- Quarter-turn fastener secures wireway cover to housing
- Special reflectors are available for precise light distribution
- TLED fixtures provide on-site lamping flexibility and simple installation
- Available on QuickShip
- This fixture is proudly made in the USA

SPECIFICATIONS

- HOUSING** – 22-gauge die-formed C.R.S.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING** – Surface or suspended.
- LABELS** – UL/CUL listed as LED surface luminaire suitable for dry or damp locations.
- WARRANTY** – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: 76 - 4 - 24T8LS/B - OPTIONS - UNV

ORDERING INFO

SERIES	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
76	4 4'	4' Fixtures	4T5L 4' T5 LED tube	S Single end	B Type B
	8 8'	1, 2, or 3 8' Fixtures	4T8L 4' T8 LED tube	D Double end	
		2, 4, or 6 ^[1]			

OPTIONS ^[2]

WG-7611	11-gauge white powder coat wireguard
WG-7614	14-gauge white powder coat wireguard
VBY	(2) Y-hangers
GC2/Y18/_	Cable suspension system (1 pair) ^[3]
GC2/L/10	10' cable suspension system with loop ^[4]
320	1-1/2" ceiling spacer
SHS	Surface mount hanger for NEMA-G T-bar system
GAT	T-bar fastener for 320 ceiling spacer
SS-__	Single stem & canopy ^[5]
SWS-__	Stem & swivel canopy ^[6]

VOLTAGE

UNV 120-277V

QUICKSHIP


4'	76-4-24T8LS/B-QS-UNV
8'	76-8-44T8LS/B-QS-UNV

NOTES

- 1, 2, or 3-lamp cross-section.
- See page 2 for SPECIAL REFLECTORS, shipped separately.
- For cable suspension options see MOUNTING ACCESSORIES on page 2.
- Requires VBY hanger.
- For Single Stem & Canopy options see MOUNTING ACCESSORIES on page 2.
- For Stem & Swivel Canopy options see MOUNTING ACCESSORIES on page 2.




FIXTURE DETAILS

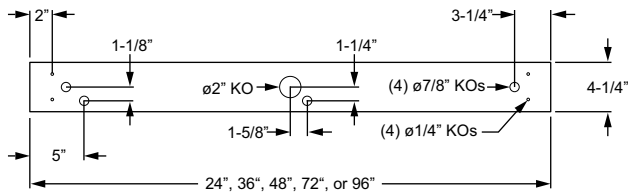

Note: Center ø2" and ø7/8" KOs are on 4', 6', and 8' units only.


REFLECTOR DETAILS

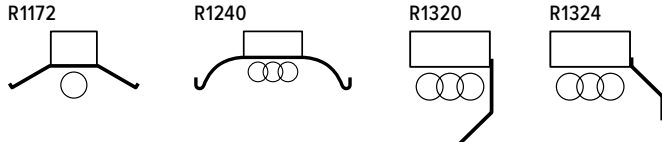

- Reflectors are ordered separately. Example: R1172-4-76 REFL For additional styles, see [Technical Info](#).
- Clear polycarbonate reflector aligners for continuous row applications (8' unit only) are ordered with reflectors.
- Note: Drawings represent reflector style. Actual cross-section will vary depending on fixture/lamp configuration.

MOUNTING ACCESSORIES

CABLE SUSPENSION KITS



- GC2/Y18/_** Adjustable cable suspension with "Y" intersection—available in lengths of 5', 10', 15', and 20'
- GC2/L/10** 10' adjustable cable suspension system with loop


VBY HANGER



- VBY** 1 pair VBY hangers


Note: Hanger is available with 2' or 3' precut #12 wrapped chain. To order specify length of chain in feet following VBY hanger catalog number (example: VBY-2).

CEILING MOUNT BRACKET




- 320** 1-1/2" ceiling spacer

SURFACE MOUNT HANGER




- SHS** Surface mount hanger for NEMA-G T-bar system

GAT FASTENER




- GAT** T-bar fastener for 320 ceiling spacer

SINGLE STEM & CANOPY



- SS-8** 8" stem (3/8" IPS) and canopy (ø5")
- SS-12** 12" stem (3/8" IPS) and canopy (ø5")
- SS-18** 18" stem (3/8" IPS) and canopy (ø5")
- SS-24** 24" stem (3/8" IPS) and canopy (ø5")
- SS-36** 36" stem (3/8" IPS) and canopy (ø5")

STEM & SWIVEL CANOPY



- SWS-8** 8" stem (3/8" IPS) and swivel canopy (ø5")
- SWS-12** 12" stem (3/8" IPS) and swivel canopy (ø5")
- SWS-24** 24" stem (3/8" IPS) and swivel canopy (ø5")