




Shown with lamps, not included

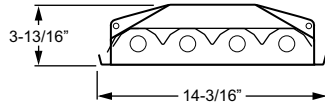

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Quick-wire access plate in back of fixture housing for easy attachment of incoming power supply
- Shallow fixture depth of less than 4" allows fixture placement near the ceiling for maximum space utilization and reduces damage incurred from material handling equipment
- Variety of mounting options
- TLED fixtures provide on-site lamping flexibility and simple installation
- Available on QuickShip
- This fixture is proudly made in the USA

SPECIFICATIONS

- HOUSING** – Die-formed 22-gauge C.R.S. housing.
- REFLECTOR** – Precision-formed 95% reflective highly specular aluminum.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING** – Suspended.
- LABELS** – UL/CUL listed as LED suspended luminaire suitable for dry or damp locations.
- WARRANTY** – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: GL - 4 - 44T8LS/B - OPTIONS - UNV

ORDERING INFO

SERIES	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
GL	4 4'	T5 Fixtures	4T5L 4' T5 LED tube	S Single end	B Type B
		T8 Fixtures	4T8L 4' T8 LED tube	D Double end	
		3, 4, 6, or 8			
		4, 6, or 8			

OPTIONS

- WD** Wide distribution ^[1]
- UP** Uplight apertures
- WG11** 11-gauge wireguard, white powder coated
- VBY** (2) Y-hangers
- GC2/Y18/_** Cable suspension system (1 pair)
- GC2/L/10** 10' cable suspension system with loop ^[2]
- 3SB** 3" spacer bracket (1 pair)
- HUB MT 3/4"** Cast iron hub and junction box for single 3/4" pendant mount ^[3]
- HUB/HOOK MT** Cast iron hub with mounting hook ^[4]
- HOOK/CABLE** Hook and cable mounting kit, 10'
- S7238/B** 72" cord, 3-conductor, No. 18 AWG, black
- PHSCHA118** Piano hinge steel door frame, clear, high-temperature, non-prismatic acrylic, .118" thick
- SCHA118** Steel door frame, clear, high-temperature, non-prismatic acrylic, .118" thick

VOLTAGE

UNV 120-277V




GL-4-44T5LS/B-(2)VBY/PWU-QS-UNV
GL-4-64T5LS/B-(2)VBY/PWU-QS-UNV

NOTES



- White reflector - fixture distribution determined by selected lamp.
- Requires VBY hanger.
- Shipped not attached.
- Shipped not attached.



FIXTURE DETAILS

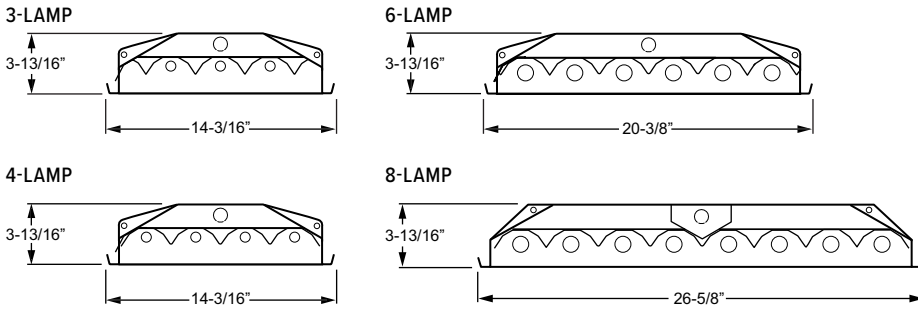


BACK VIEW DETAILS

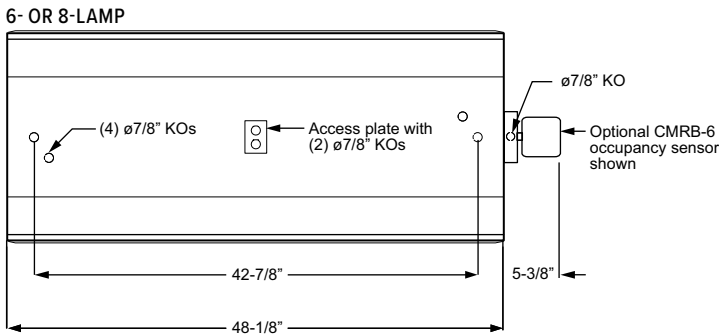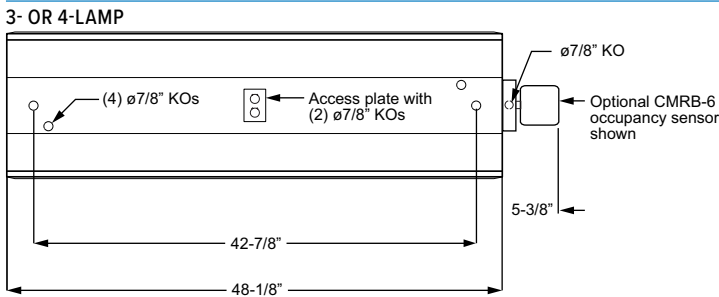


MOUNTING ACCESSORIES


CABLE SUSPENSION KITS

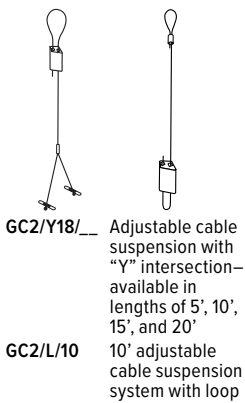


VBY HANGER

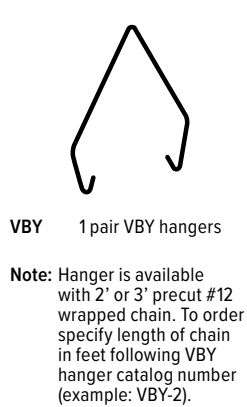

SPACER BRACKET



HUB MOUNTS

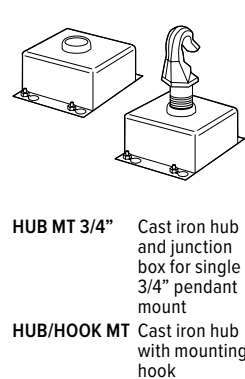

HOOK AND CABLE

