

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- 3-7/16" deep housing installs easily within limited plenum space
- Gasketed door frame features offset mitered corners to eliminate light leaks
- Available with a wide variety of lens options
- Cam latches close securely and allow access on either side
- Deep reinforcement ribs provide added strength
- Integral T-bar clips quickly secure fixture to structure
- TLED fixtures provide on-site lamping flexibility and simple installation
- Available on QuickShip
- This fixture is proudly made in the USA

SPECIFICATIONS

- HOUSING – 22-gauge die-formed C.R.S.
- DOOR FRAME – 22-gauge C.R.S., offset mitered corners, cam latches, and T-style hinges.
- SHIELDING – Clear acrylic, pattern #12, .125" thick prismatic lens
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING – NEMA Type "G" standard. For flange installations use the Drywall Kit (DFK), ordered separately.
- LABELS – UL/CUL listed as LED recessed luminaire suitable for dry or damp locations.
- WARRANTY – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: LPT - 24 - 44T8LS/B - SA12125 - OPTIONS - UNV

ORDERING INFO

SERIES	NOMINAL WIDTH	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
LPT	2 2'	2 2' 4 4'	2, 3, or 4	2T8L 2' T8 LED tube 4T8L 4' T8 LED tube	S Single end D Double end	B Type B

DOOR FRAME	SHIELDING	OPTIONS	VOLTAGE
S White flat steel	A12125 Clear acrylic, pattern #12, .125" thick A12100 Clear acrylic, pattern #12, .100" thick A19156 Clear acrylic, pattern #12, .156" thick PC1SS Parabolic louver, silver styrene, nominal 1/2" x 1/2" x 1/2" PC2SS Parabolic louver, silver styrene, nominal 1-1/2" x 1-1/2" x 1"	F338 6', 3/8" flex, 3-conductor, No. 18 AWG EQCLIPS Earthquake clips ⁽¹⁾	UNV 120-277V

QUICKSHIP


- 2x2**
LPT-22-22T8LS/B-SA12100-QS-UNV
- 2x4**
LPT-24-34T8LS/B-SA12100-QS-UNV
LPT-24-44T8LS/B-SA12100-QS-UNV

NOTES


¹ 4 clips per fixture.

FIXTURE DETAILS


2-LAMP



3-LAMP




4-LAMP




BACK VIEW DETAILS


2 X 2 - 2 & 4 LAMPS

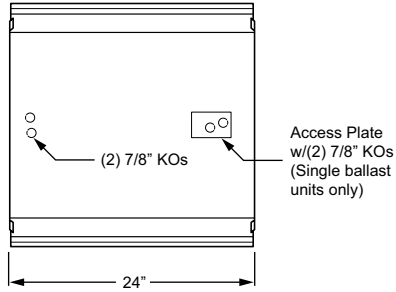

2 X 2 - 3 LAMPS

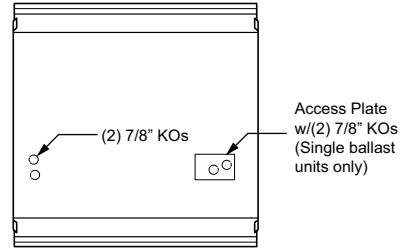

2 X 4 - 2 & 4 LAMPS

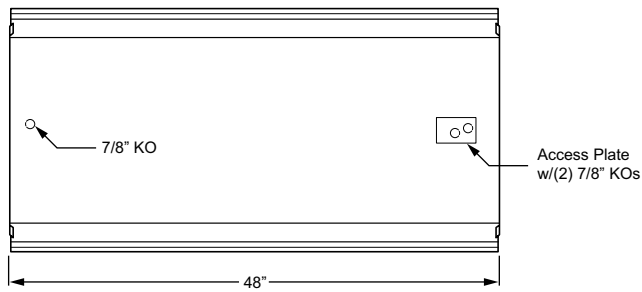

2 X 4 - 3 LAMPS

