

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Ultra-bright, energy efficient, long life LEDs
- Message available in red or green
- Adjustable high performance, smooth, chrome-plated, metalized reflector and acrylic, UV-stabilized lightpipe lens for optimal light distribution
- Charge rate/power "On" LED indicator and push-to-test switch for mandated code compliance testing
- 4.8V long-life, maintenance-free, rechargeable NiCd battery
- Minimum 90 minutes of emergency operation
- Fully automatic solid-state system recharges battery in 24 hours
- Remote capacity of 3.0 watts standard
- Removable directional indicators
- Custom message available

SPECIFICATIONS

- HOUSING** – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic
- ELECTRICAL** – Universal voltage, 120 or 277 VAC operation.
- MOUNTING** – Mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.
- LISTINGS** –
 - UL 924 standard as an exit light suitable for dry or damp locations (0°C – 50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, local and state codes.
 - Certified to CEC under Title 20 Regulations.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: EXIT/EM/LP - R - WHT - OPTIONS - D

ORDERING INFO

SERIES	LETTER COLOR	HOUSING COLOR	OPTIONS	VOLTAGE
EXIT/EM/LP	R Red G Green	BLK Black WHT Industry-standard white	SDT Self-diagnostic test ^[1] COPY Consult factory for custom message RC Remote capable WG Wireguard ^[2] PC1 Polycarbonate shield ^[3]	D 120V or 277V

REMOTE HEADS: RHL - T - WHT - OPTIONS - MV ^[4]

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
RHL	Single remote head	T Thermoplastic ^[5]	SDT For use with self-diagnostic test fixtures ^[10]	MV Multi-voltage ^[11]
DRHL	Dual remote head	D Die-cast ^[6]	HL 1.5-watt remote head, 12 LEDs	
WETRHL	Wet location single remote head	P Polycarbonate ^[7]		
WETDRHL	Wet location dual remote head	BLK Black GRAY Gray ^[9]		

NOTES

- EM only.
- Shipped separately. See page 2 for WIREGUARD DETAILS.
- Shipped separately. See page 2 for POLYCARBONATE SHIELD DETAILS.
- Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- RHL and DRHL only.

- WETRHL and WETDRHL only.
- WETRHL and WETDRHL only.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- Required when fixture is specified with SDT.
- For use with 3.6V, 6V, 9.6V, or 12V batteries.




EXIT/EM/LP^{LED} Lightpipe Exit & Emergency

ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	4.5	0.04
277V	4.5	0.02

MOUNTING DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

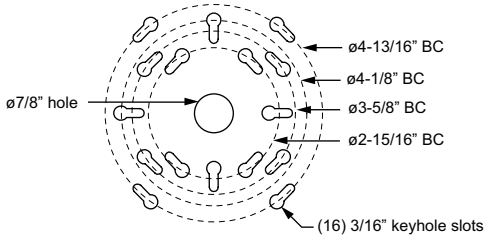

REMOTE HEAD DETAILS

RHL



DIMENSIONS: 4-1/2" x 5-7/8" x 4-7/8"

DRHL



DIMENSIONS: 4-1/2" x 8-1/2" x 5"

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

POLYCARBONATE SHIELD DETAILS

PC1



DIMENSIONS: 13-3/16" x 9-3/16" x 2-1/2"

WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"