

CATALOG #: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Spec-grade Exit sign with LED lamp heads in one low-profile housing
- Ultra-bright, energy efficient, long life LEDs
- Message in red or green
- Two fully adjustable high performance premium grade LED lamps
- Charge rate/power on LED indicator and built-in test switch on emergency units
- 8.4V long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch for minimum 90 minutes of emergency operation
- Fully automatic solid-state system on EM units recharges battery in 24 hours
- Removable directional indicators
- Universal design allows for single and double face
- Remote capacity of up to 3.0 W

## SPECIFICATIONS

- HOUSING** – Premium-grade extruded aluminum
- ELECTRICAL** – Universal voltage, 120 or 277 VAC operation.
- MOUNTING** – Aluminum mounting canopy for ceiling or side mount installation. Universal knockout pattern on back for wall mount.
- LISTINGS** –
  - UL 924 standard as an exit light suitable for dry or damp locations (0°C – 50°C).
  - Meets NFPA 101 Life Safety Code, NEC, OSHA, local and state codes.
  - Certified to CEC under Title 20 Regulations.
- WARRANTY** – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty).

## ORDERING EXAMPLE: EXIT/EM/CA - SF - R - WF - WHT - AC - OPTIONS - D

### ORDERING INFO

SERIES	NUMBER OF FACES	LETTER COLOR	FACEPLATE FINISH	HOUSING COLOR
EXIT/EM/CA	SF Single face	R Red	AF Brushed aluminum	WHT Industry-standard white
	DF Double face	G Green	BF Black	BLK Black
	UF Universal single/double face		WF Industry-standard white	BA Brushed aluminum

POWER OPTIONS	OPTIONS	VOLTAGE
AC AC operation	RC Remote capable	D 120V or 277V
EM AC operation with emergency battery backup	PC2 Polycarbonate shield <sup>[1]</sup>	SV__ Special voltage <sup>[3]</sup>
	WG Wireguard <sup>[2]</sup>	

### REMOTE HEADS: RHL - T - WHT - OPTIONS - MV <sup>[4]</sup>

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
RHL Single remote head	T Thermoplastic <sup>[5]</sup>	WHT Industry-standard white <sup>[8]</sup>	HL 1.5-watt remote head, 12 LEDs	MV Multi-voltage <sup>[10]</sup>
DRHL Dual remote head	D Die-cast <sup>[6]</sup>			
WETRHL Wet location single remote head	P Polycarbonate <sup>[7]</sup>	BLK Black		
WETDRHL Wet location dual remote head		GRAY Gray <sup>[9]</sup>		

## NOTES


- Shipped separately. See page 2 for POLYCARBONATE SHIELD DETAILS.
- Shipped separately. See page 2 for WIREGUARD DETAILS.
- Consult factory for options.
- Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- WETRHL and WETDRHL only.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- For use with 3.6V, 6V, 9.6V, or 12V batteries.

## ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	4.6	0.05
277V	4.8	0.02

## MOUNTING DETAILS

### WALL MOUNT BOLT CIRCLE PATTERN

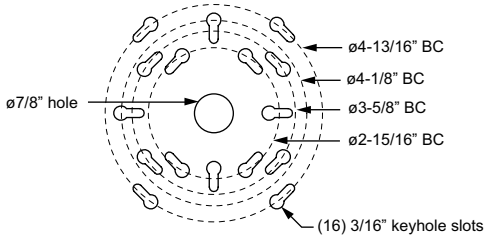

## REMOTE HEAD DETAILS

RHL



DIMENSIONS: 4-1/2" x 5-7/8" x 4-7/8"

DRHL



DIMENSIONS: 4-1/2" x 8-1/2" x 5"

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

## POLYCARBONATE SHIELD DETAILS


PC2



DIMENSIONS: 15" x 22" x 7-3/4"

## WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"