

NEW YORK CITY-APPROVED CAST ALUMINUM LED EXIT

EXIT/CA/NYC

| | |
|------------|--------|
| CATALOG #: | TYPE: |
| PROJECT: | NOTES: |


LED



EXAMPLE → **EXIT/CA/NYC - AF - BLK - AC - OPTIONS - D**

SERIES FACEPLATE FINISH HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES VOLTAGE

CROSS SECTIONS

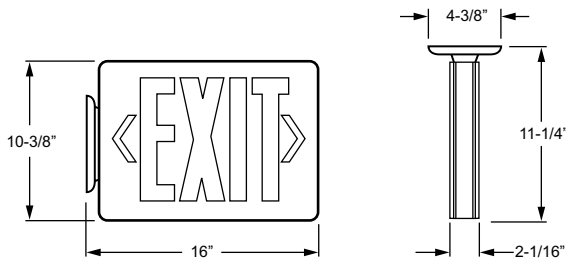

ORDERING INFORMATION

| | | | |
|-------------------------|---|---|--|
| SERIES | | POWER OPTIONS | |
| EXIT/CA/NYC | New York City-Approved Cast Aluminum LED Exit | AC | AC operation |
| | | EM | AC operation with emergency battery backup |
| FACEPLATE FINISH | | OPTIONS | |
| AF | Brushed aluminum faceplate | DC | Dual circuit (AC only) |
| BF | Black faceplate | SDT | Self-diagnostic test (EM only) |
| WF | Industry-standard white faceplate | | |
| HOUSING COLOR | | ACCESSORIES (Shipped separately) | |
| BLK | Black | See back for details. | |
| BA | Brushed aluminum | PC2 | Polycarbonate shield |
| WHT | Industry-standard white | WG/COMBO | Wireguard |
| | | VOLTAGE | |
| | | D | 120V or 277V |

FEATURES

- ▶ New York City-approved 8" tall red letters.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red.
- ▶ Available as a full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Compact, low profile design.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Removable directional indicators.
- ▶ Unique design allows double face conversion in the field.
- ▶ Quick-snap face plate closure.

LED

SPECIFICATIONS

Housing – Premium-grade, aluminum housing
Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Aluminum mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.


Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

| Catalog Number | Input Watts (W) | | Input Amps (A) | |
|----------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| EXIT/CA/NYC-EM | 5.0 | 5.0 | 0.041 | 0.018 |

ACCESSORIES

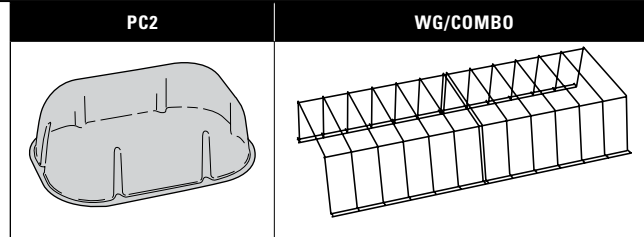

BOLT CIRCLE PATTERN

