

CAST ALUMINUM LED EXIT SIGN

EXIT/CA

LED

CATALOG #: _____ TYPE: _____


PROJECT: _____ NOTES: _____

EXAMPLE → **EXIT/CA - R - AF - WHT - AC - OPTIONS - D**

SERIES LETTER COLOR FACEPLATE FINISH HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES VOLTAGE



CROSS SECTIONS

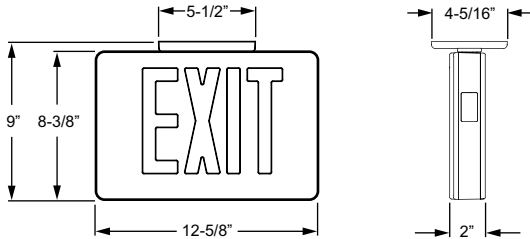

ORDERING INFORMATION

SERIES
EXIT/CA Cast Aluminum LED Exit Sign

LETTER COLOR
R Red
G Green

FACEPLATE FINISH
AF Brushed aluminum faceplate
BF Black faceplate
WF Industry-standard white faceplate

HOUSING COLOR
BLK Black
BA Brushed aluminum
WHT Industry-standard white

POWER OPTIONS
AC AC operation
EM AC operation with emergency battery backup

OPTIONS
DC Dual circuit (AC only)
SDT Self-diagnostic test (EM only)
TP Tamper-resistant

ACCESSORIES (Shipped separately)
 See back for details.
PC1 Polycarbonate shield
WG Wireguard

VOLTAGE
D 120V or 277V
SV__ Special voltage, consult factory for options

FEATURES

- ▶ Universal design allows for single and double face.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Fully automated solid-state, two-rate charger indicates battery charging to recharge a discharge battery in 24 hours.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Compact, low profile design.
- ▶ Field selectable knockout chevron directional indicators under the faceplate.

LED

ELECTRICAL INFORMATION

SPECIFICATIONS

Housing – Premium-grade cast aluminum

Electrical – Universal voltage, 120 or 277 VAC operation.


Mounting – Aluminum mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.

Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/CA-R-EM-DC-SDT	3.2	3.6	0.031	0.019
EXIT/CA-G-EM-DC-SDT	3.8	4.4	0.033	0.017

ACCESSORIES

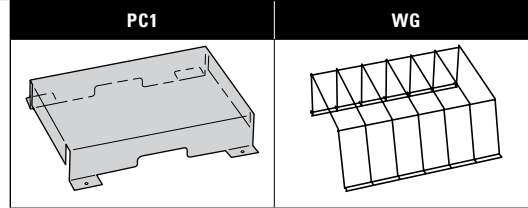

BOLT CIRCLE PATTERN

