

# CHICAGO-APPROVED LED EXIT LIGHT

# EXIT/CHICAGO

CATALOG #:	TYPE:
PROJECT:	NOTES:


LED



**EXAMPLE** → **EXIT/CHICAGO** - **SF** - **AC** - **NA** - **OPTIONS** - **D**

SERIES                      NUMBER OF FACES                      POWER OPTIONS                      DIRECTIONAL ARROWS                      OPTIONS/ACCESSORIES                      VOLTAGE

## CROSS SECTIONS

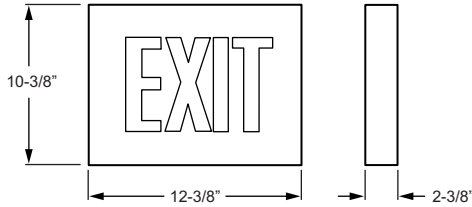

## ORDERING INFORMATION

**SERIES**  
**EXIT/CHICAGO** Chicago-Approved LED Exit Light

**NUMBER OF FACES** (Must specify)  
**SF** Single face  
**DF** Double face

**POWER OPTIONS** (Must specify)  
**AC** AC operation (120V only)  
**EM** AC operation with emergency battery backup (see back for details)

### DIRECTIONAL ARROWS <sup>1</sup> (Must specify)

See back for details  
**EXIT SIGNAGE**  
**NA** No arrows  
**DA** Double arrows  
**RA** Right arrow (single face only)  
**LA** Left arrow (single face only)  
**LARA** Left/Right arrow (double face only)

**STAIR SIGNAGE**  
**SWNA** Stairs no arrow  
**SWDA** Stairs double arrows  
**SWRA** Stairs right arrow (single face only)  
**SWLA** Stairs left arrow (single face only)  
**SWLARA** Stairs left/right arrow (double face only)

### ACCESSORIES (Shipped separately)

See back for details.  
**PC2** Polycarbonate shield  
**WG** Wireguard

### VOLTAGE

**D** 120V or 277V

## FEATURES

- ▶ Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free, rechargeable Ni-Cd battery provides 120 minutes of emergency operation on EM units.
- ▶ Automatic, low voltage disconnect (LVD) activates EM unit in event of partial power failure or brownout.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Industry-standard white housing and red letters on white glass lens.
- ▶ Single or double face configurations.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.

<sup>1</sup> These units come standard with no directional arrows. If directional arrows are required for your application, it must be specified on all orders.

## LED

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/CHICAGO	5.0	5.0	.10	.05

## SPECIFICATIONS

**Housing** – Durable, powder-coated 20-gauge steel construction.

**Lens** – Open face glass panel with silk-screened letters.


**Electrical** – Universal voltage, 120 or 277 VAC operation (EM unit only). 120 volt, AC unit.

**Mounting** – Mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.


**Labels** – Listed to UL 924 standard as an exit light suitable for dry or damp locations. Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Warranty** – 5-year limited warranty


## ACCESSORIES

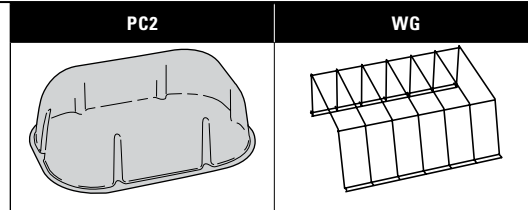

## FIXTURE DETAILS

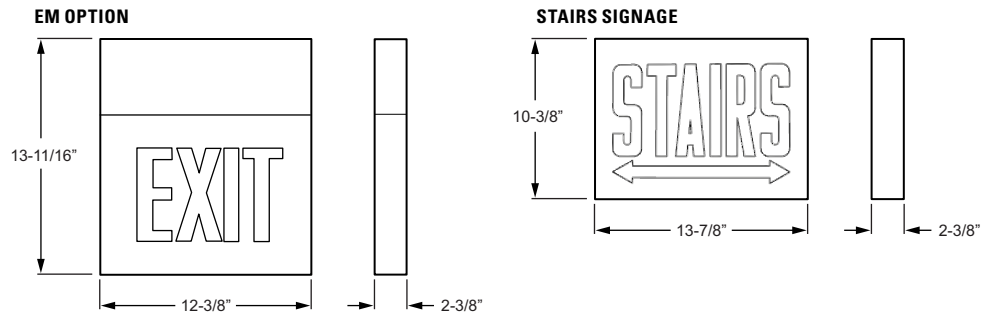

### DIRECTIONAL ARROWS

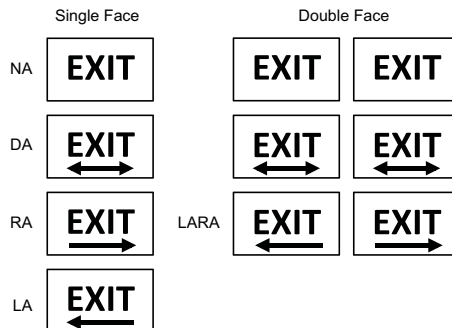

### BOLT CIRCLE PATTERN

