

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Spec-grade Exit sign with LED lamp heads in one low-profile housing
- Ultra-bright, energy efficient, long life LEDs
- Message in red or green
- Two fully adjustable high performance premium grade LED lamps
- Charge rate/power on LED indicator and built-in test switch on emergency units
- 8.4V long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch for minimum 90 minutes of emergency operation
- Fully automatic solid-state system recharges battery in 24 hours
- January 15, 2020, 1:35 PM
- Removable directional indicators
- Universal design allows for single and double face
- Remote capacity of up to 3.0 W

SPECIFICATIONS

- HOUSING** – Premium-grade extruded aluminum.
- ELECTRICAL** – Universal voltage, 120 or 277 VAC operation.
- MOUNTING** – Aluminum mounting canopy for ceiling or side mount installation. Universal knockout pattern on back for wall mount.
- LISTINGS** –
 - UL 924 standard as an exit light suitable for dry or damp locations (0°C – 50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, local and state codes.
 - Certified to CEC under Title 20 Regulations.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: EXIT/EM/CA - R - WF - WHT - OPTIONS - D

ORDERING INFO

SERIES	LETTER COLOR	FACEPLATE FINISH	HOUSING COLOR
EXIT/EM/CA	R Red	AF Brushed aluminum	WHT Industry-standard white
	G Green	BF Black	BLK Black
		WF Industry-standard white	BA Brushed aluminum

OPTIONS	VOLTAGE
RC Remote capable	D 120V or 277V
PC2 Polycarbonate shield ^[1]	SV__ Special voltage ^[3]
WG Wireguard ^[2]	

REMOTE HEADS: RHL - T - WHT - OPTIONS - MV^[4]

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
RHL Single remote head	T Thermoplastic ^[5]	WHT Industry-standard white ^[8]	HL 1.5-watt remote head, 12 LEDs	MV Multi-voltage ^[10]
DRHL Dual remote head	D Die-cast ^[6]	BLK Black		
WETRHL Wet location single remote head	P Polycarbonate ^[7]	GRAY Gray ^[9]		
WETDRHL Wet location dual remote head				

NOTES


- Shipped separately. See page 2 for POLYCARBONATE SHIELD DETAILS.
- Shipped separately. See page 2 for WIREGUARD DETAILS.
- Consult factory for options.
- Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- WETRHL and WETDRHL only.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- For use with 3.6V, 6V, 9.6V, or 12V batteries.

ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	4.6	0.05
277V	4.8	0.02

MOUNTING DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

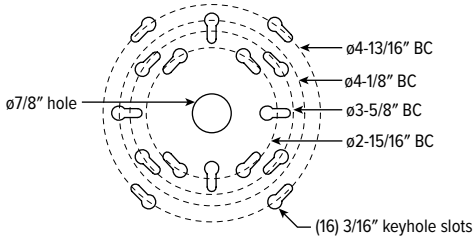

REMOTE HEAD DETAILS

RHL



DIMENSIONS: 4-1/2" x 5-7/8" x 4-7/8"

DRHL



DIMENSIONS: 4-1/2" x 8-1/2" x 5"

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

POLYCARBONATE SHIELD DETAILS

PC2



DIMENSIONS: 15" x 22" x 7-3/4"

WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"