

NEW YORK CITY-APPROVED EXIT & EMERGENCY LIGHT

EXIT/EM/NYC

CATALOG #:	TYPE:
PROJECT:	NOTES:


LED

EXAMPLE → **EXIT/EM/NYC - WHT - OPTIONS - D**

SERIES
HOUSING COLOR
OPTIONS
VOLTAGE



CROSS SECTIONS

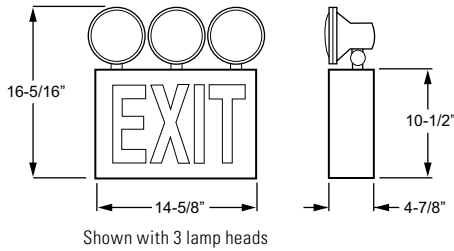

ORDERING INFORMATION

SERIES	
EXIT/EM/NYC	New York City-Approved Exit & Emergency Light
HOUSING COLOR (Must specify)	
BLK	Black
WHT	Industry-standard white

OPTIONS	
NH	No heads
VOLTAGE	
D	120V or 277V

FEATURES

- ▶ New York City-approved 8" tall red letters.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red.
- ▶ Includes two 12-watt factory installed lamp heads and one 12-watt lamp head that can be field-installed, with no lamp heads optional.
- ▶ Fully automatic solid-state system recharges battery in 24 hours.
- ▶ Charge rate/power on LED indicator and built-in test switch.
- ▶ Automatic low voltage disconnect (LVD) activates in event of partial power failure or brownout.
- ▶ 6V maintenance-free sealed lead acid NiCd provides 90 minutes of emergency operation.
- ▶ Removable directional indicators
- ▶ Knockouts provided on sides of unit to relocate lamp heads.

LED

ELECTRICAL INFORMATION

SPECIFICATIONS

Housing – Durable, powder-coated 10-gauge steel construction. Injection-molded, engineering-grade, high-impact thermoplastic heads.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Wall mount. Top and side knockouts for conduit feed application.

Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/EM/NYC	12.7	14.3	0.115	0.056