

WET LOCATION LED EXIT & EMERGENCY LIGHT

EXIT/EM/WET

CATALOG #: _____ TYPE: _____

PROJECT: _____


NOTES: _____

EXAMPLE → **EXIT/EM/WET - R - GRAY - OPTIONS - D**

SERIES LETTER COLOR HOUSING COLOR OPTIONS/ACCESSORIES VOLTAGE



CROSS SECTIONS

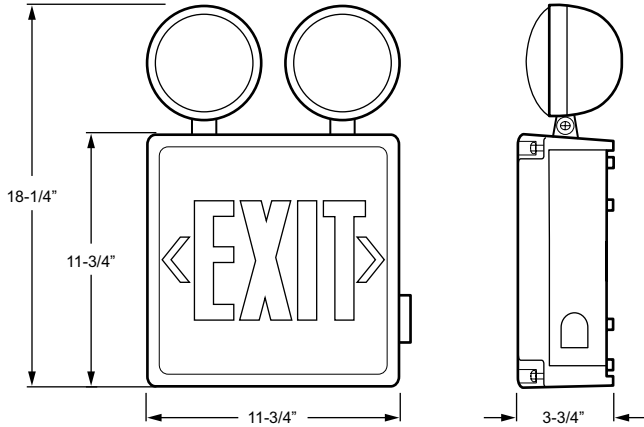

FEATURES

- ▶ Wet location listed.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ High-performance reflector and tempered glass lens for optimal light distribution.
- ▶ 6V long-life, maintenance-free, NiCd battery provides 90 minutes of emergency operation.
- ▶ Fully automatic solid-state system recharges battery in 24 hours.
- ▶ Corrosion-resistant enclosure and engineering grade silicone gasket.
- ▶ Charge rate/power on LED indicator and built-in test switch.
- ▶ Two fully adjustable, glare-free 5.4-watt incandescent lamp heads.
- ▶ Removable directional indicators.

ORDERING INFORMATION

SERIES		HOUSING COLOR (Must specify)	
EXIT/EM/WET	Wet Location LED Exit & Emergency Light	GRAY	Gray
LETTER COLOR (Must specify)		OPTIONS	
R	Red	HTR	Internal heater
G	Green	SALIDA	Salida faceplate, consult factory for options
		VOLTAGE	
		D	120V or 277V
		SV__	Special voltage, consult factory for options

SPECIFICATIONS

Housing – 5VA flame retardant, UV-stabilized polycarbonate with high-impact resistant, UV-stabilized polycarbonate clear lens.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Wall mount. Top and side knockouts for conduit feed applications.

Labels – Listed to UL 924 standard as an emergency/exit light suitable for wet locations. Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/EM/WET	7.2	7.7	0.063	0.030

FIXTURE DETAILS

BOLT CIRCLE PATTERN

