


EXIT/REMOTE LED Exit Light With Remote

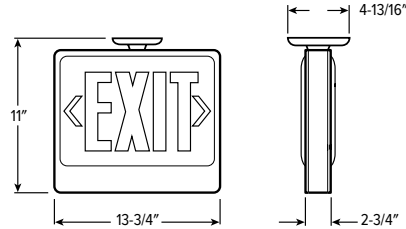

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Ultra-bright, energy efficient, long-life LEDs available in red or green
- 6-volt, sealed lead acid, maintenance-free battery provides 90 minutes of emergency operation
- Automatic, low voltage disconnect (LVD) activates unit in event of partial power failure or brownout
- Removable directional indicators
- Fully automatic solid-state system on EM units recharges battery in 24 hours
- Charge rate/power on LED indicator and built-in test switch
- Unique design allows double face conversion in the field
- Available with industry-standard white or black housing
- Larger battery supports 11-watt remote capability
- Battery supports 10.8-watt remote capability

ORDERING EXAMPLE: EXIT/REMOTE - R - WHT - OPTIONS - D

ORDERING INFO

SERIES	LETTER COLOR	HOUSING COLOR	OPTIONS	VOLTAGE
EXIT/REMOTE	R Red G Green	WHT Industry-standard white BLK Black	HTR Internal heater SALIDA Salida faceplate PC2 Polycarbonate shield ^[1] WG Wireguard ^[2]	D 120V or 277V

REMOTE HEADS: RHL - T - WHT - OPTIONS - MV ^[3]

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
RHL	Single remote head	T Thermoplastic ^[4]	WHT Industry-standard white ^[7]	HL 1.5-watt remote head, 12 LEDs
DRHL	Dual remote head	D Die-cast ^[5]	BLK Black	MV Multi-voltage ^[9]
WETRHL	Wet location single remote head	P Polycarbonate ^[6]	GRAY Gray ^[8]	
WETDRHL	Wet location dual remote head			

SPECIFICATIONS

- HOUSING – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic.
- ELECTRICAL – Universal voltage, 120 or 277 VAC operation.
- MOUNTING – Mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.
- LISTINGS –
 - Listed to UL 924 standard as an exit light suitable for dry or damp locations (20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY – 5-year limited warranty.

NOTES

- Shipped separately. See page 2 for POLYCARBONATE SHIELD DETAILS.
- Shipped separately. See page 2 for WIREGUARD DETAILS.
- Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- RHL and DRHL only.

- WETRHL and WETDRHL only.
- WETRHL and WETDRHL only.
- RHL and DRHL only.
- WETRHL and WETDRHL only.
- For use with 3.6V, 6V, 9.6V, or 12V batteries.


EXIT/REMOTE LED Exit Light With Remote

ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	10	0.10
277V	10	0.05

MOUNTING DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

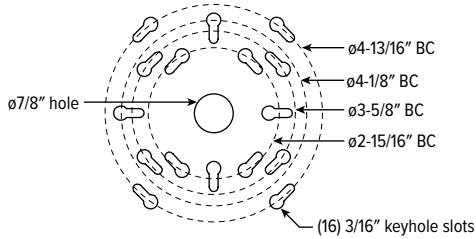

REMOTE HEAD DETAILS

RHL



DIMENSIONS: 4-1/2" x 5-7/8" x 4-7/8"

DRHL



DIMENSIONS: 4-1/2" x 8-1/2" x 5"

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

POLYCARBONATE SHIELD DETAILS


PC2



DIMENSIONS: 15" x 22" x 7-3/4"

WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"