


EMER/MRW ^{LED} MR-16 Style Emergency Light - Wet Location



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Two fully adjustable, ultra bright, round, 3.3W white LED lamp heads
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Low voltage disconnect prevents battery from deep discharge
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

ORDERING EXAMPLE: EMER/MRW - GRAY - OPTIONS - D

ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/MRW	GRAY Gray BLK Black	HTR Internal heater ^[1] CW Internal heater with battery blanket ^[2] WG Wireguard ^[3]	D 120V or 277V SV__ Special voltage ^[4]

SPECIFICATIONS

- HOUSING** – Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in grey or black finish. Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.
- ELECTRICAL** – Dual 120/277 voltage. 6V maintenance-free, rechargeable sealed lead acid battery. Remote capacity up to 20W.
- MOUNTING** – Wall mount via knockouts on the back of the housing.
- LISTINGS** –
 - UL 924 standard as an emergency light suitable for wet locations (20°C - +40°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

NOTES

- ¹ For cold temperature applications -9°C - +40°C.
- ² For cold temperature applications -25°C - +40°C.

- ³ Ships separately. See page 2 for WIREGUARD DETAILS.
- ⁴ Consult factory for options.


EMER/MRW^{LED} MR-16 Style Emergency Light - Wet Location

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EMER/MRW	6.0	6.2	0.053	0.025
EMER/MRW - CW	5.3	6.0	0.050	0.025

MOUNTING DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

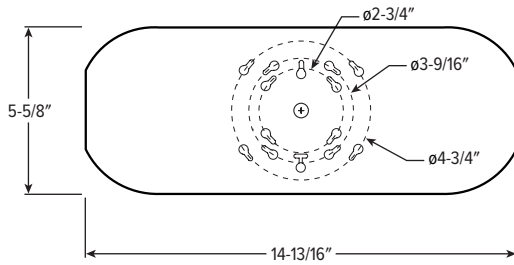

WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"