

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Sealed and gasketed weather proof lamp heads with high performance chrome-plated metallized reflector and tempered glass lenses for optimal light distribution
- Long lasting, efficient, ultra bright white LED lamp heads
- Charge rate/power "on" LED indicator light and push-to-test switch for mandated code compliance testing
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ORDERING EXAMPLE: EMER/W - GRY - OPTIONS - D

ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/W	GRAY Gray BLK Black	PC2 Polycarbonate shield ^[1] WG Wireguard ^[2]	D 120V or 277V SV__ Special voltage ^[3]

REMOTE HEADS: WETRHL - P - GRAY - OPTIONS - MV^[4]

SERIES ^[5]	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
WETRHL	Wet location single remote head	P Polycarbonate D Die-cast	BLK Black GRAY Gray	HL 1.5-watt remote head, 12 LEDS MV Multi-voltage ^[6]
WETDRHL	Wet location dual remote head			

SPECIFICATIONS

- HOUSING** – Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish. Sealed and gasketed housing with hinged cover. Sealed test switch.
- ELECTRICAL** – Dual 120/277 voltage. 9.6V long life, maintenance-free, rechargeable NiCd battery. Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C. 1.875 watt (15 LEDs x 0.125) per head.
- MOUNTING** – External mounting brackets for simplified wall mounting.
- LISTINGS** –
 - UL 924 standard as an emergency light suitable for wet locations (-20°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

NOTES

- ¹ Ships separately. See page 2 for POLYCARBONATE SHIELD DETAILS.
- ² Ships separately. See page 2 for WIREGUARD DETAILS.
- ³ Consult factory for options. Not available with remote heads.

- ⁴ Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- ⁵ 8 LEDs.
- ⁶ For use with 3.6V, 6V, 9.6V, or 12V batteries.

EMER/W^{LED} Emergency Light - Wet Location

ELECTRICAL INFORMATION


	INPUT WATTS (W)	INPUT AMPS (A)
120V	2.7	0.030
277V	2.7	0.013

MOUNTING DETAILS


	INPUT WATTS (W)	INPUT AMPS (A)
120V	2.7	0.030
277V	2.7	0.013

MOUNTING DETAILS

BACKVIEW

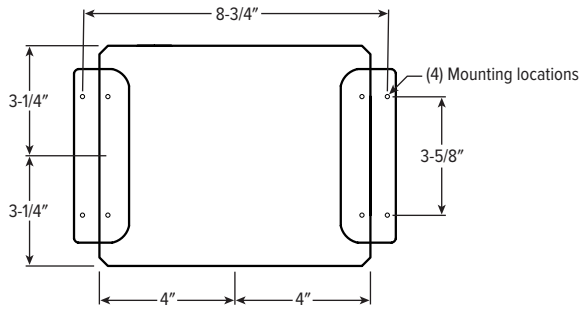

RIGHT SIDE VIEW

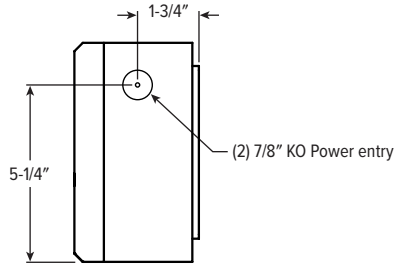

REMOTE HEAD DETAILS

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

POLYCARBONATE SHIELD DETAILS

PC2



DIMENSIONS: 15" x 22" x 7-3/4"

WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"