

Shown with SQ

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Available with BIOS® SkyBlue® technology to support proper daytime circadian stimulus
- Slim, low-profile suspended or surface mount fixture provides an architectural alternative to standard wrap-around fixtures
- Round or square profile provides design choices for a variety of applications
- Quality, frosted, extruded acrylic lens snaps securely in place to provide gentle diffused illumination
- Slim end plates are designed to conform to lens shape and prevent unsightly light leaks
- Internal, self-aligning joining method ensures straight rows
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING – 20-gauge die-formed C.R.S.
- SHIELDING – Frosted, matte acrylic, round or square profile.
- FINISH – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High quality mid-power LED boards. Rated for 50,000 hours at 70% lumen maintenance (L70).
- MOUNTING – Surface (ceiling or wall) or suspended (hanging hardware required)
- LISTINGS – cETLus conforms to UL STD 1598 and UL STD 8750. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for damp locations.
- WARRANTY – 5-year limited warranty, see hew.com/warranty



ORDERING EXAMPLE: LLM - 4 - L6/835 - S - SQ - ACF/D48 - OPTIONS - DIM - UNV

ORDERING INFO

SERIES	NOMINAL LENGTH	LUMENS ^[1]	CRI	CCT	MOUNTING TYPE
LLM	Stand-alone: 2', 4' & 8' nominal lengths, fixture ships assembled. Example: 4 = 4'	L6 600lm	8 80	27 2700K	S Surface
	Row-mount: Lengths specified in 4' increments Example: 12 = 12'	L10 1,000lm	9 90 ^[2]	30 3000K	P Suspended
		L15 1,500lm		35 3500K	
Product Builder Simplify ordering & layout design with the Williams Linear Product Builder at hew.com				40 4000K	
				50 5000K	

SHIELDING

- RD Round frosted acrylic
- SQ Square frosted acrylic

MOUNTING

AIRCRAFT CABLES (EXAMPLE: ACF/D48) ^[3]

Prefix	Type	Length
ACF/ Feeder	D 1" grid & hardpan	24 24"
ACJ/ Joiner	N 9/16" grid	48 48"
	S Slot grid	96 96"

OPTIONS ^[4]

- EM/10WLP Low profile 10-watt emergency battery ^[6]
- EM/12WR Remote mount 12-watt emergency battery (L___) Additional lower lumen packages available. Example: 800 nominal lumens = LLM-4-L10/835-(L8) ^[7]
- PS/120 Pull switch, single circuit ^[8]
- PS2/120 Two-circuit, 4-position pull switch ^[9]
- WRS/120 White rocker switch ^[10]
- 45AMB (2) 45° adjustable mounting brackets ^[11]

CONTROL ^[5]

- DIM Dimming driver
- DRV Non-dimming driver

VOLTAGE

- 120 120V
- 277 277V
- UNV 120-277V
- 347 347V ^[16]

INTEGRAL OCCUPANCY SENSORS ^[12]

- Passive Infrared (PIR):
- OCCWS FSP-211-L2-120/277 Digital high/low with L2 lens, 120V or 277V ^[13]
 - FSIR-100 Remote controller for OCCWS FSP-211 occupancy sensor. ^[14]
 - OCCSS SFR-7-120/277 Line voltage, 120V or 277V
- Ultrasonic:
- OCCWS FS-505-PP-___ Low voltage ultrasonic ^[15]

NOTES

- Lumen output based on 3500 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
- Extended lead times may apply. Consult factory for availability.
- Specify with P Mounting Type only. See page 3 for SUSPENDED MOUNTING DETAILS.
- See page 3 for FINISH OPTIONS.
- See page 2 for ADDITIONAL CONTROL OPTIONS.
- Available in 4' and 8' lengths only.
- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- 120V only. Surface mount only.
- 120V only. Surface mount only. Requires two drivers per fixture.
- 120V only. Surface mount only.
- Surface mount only. Cord recommended, ordered separately. See page 3 for SUSPENDED MOUNTING DETAILS. Field-adjustable up and down in 7-1/2" increments.
- End mount. See page 4 for OCCUPANCY SENSORS DETAILS.
- Optional FSIR-100 remote controller available, ordered separately.
- Please specify quantity required per project.
- Must specify 120V, 277V or 347V.
- Not available with EM drivers or OCC sensors.



FIXTURE PERFORMANCE DATA

	PER FOOT				
	DELIVERED LUMENS		EFFICACY (lm/W)		WATTAGE
	RD LENS	SQ LENS	RD LENS	SQ LENS	
L6	591	603	144.1	147.0	4.1
L10	998	1018	138.6	141.4	7.2
L15	1505	1536	132.7	135.5	11.3


- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 3500K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

MULTIPLIER TABLE

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.97
	3000K	0.99
	3500K	1.00
	4000K	1.03
	5000K	1.06
90 CRI	2700K	0.80
	3000K	0.82
	3500K	0.83
	4000K	0.86
	5000K	0.89

PHOTOMETRY

LLM-4-L10/835-S-SQ Total Luminaire Output: 3940 lumens; 27.9 Watts | Efficacy: 141 lm/W | 80 CRI; 3500K CCT

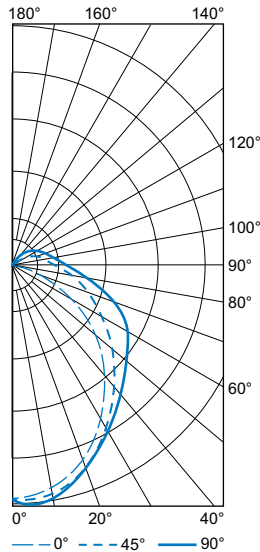

VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	1202	1202	1202	
5	1207	1213	1215	114
15	1113	1131	1137	320
25	961	996	1011	459
35	776	842	889	522
45	556	679	783	522
55	365	541	687	481
65	220	430	587	415
75	105	316	445	320
85	31	230	331	225
90	5	174	251	
95	0	166	233	155
105	0	134	181	122
115	0	110	149	95
125	0	91	127	72
135	0	73	103	51
145	0	65	91	36
155	0	48	64	20
165	0	36	42	8
175	0	13	24	1
180	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	893	23
	0 - 40	1416	36
	0 - 60	2419	61
	0 - 90	3380	86
	90 - 180	560	14
	0 - 180	3940	100


ADDITIONAL CONTROL OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder.

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (Must specify 120V or 277V only)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LTE LINE	Lutron Hi-lume 1% 2-wire dimming driver forward phase line voltage controls (120V only)
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver
LDE5	Lutron 5-Series 5% EcoSystem dimming LED driver
ELDO SOLOB	EldoLED Solodrive, 0.1% dimming driver for 0-10V controls
ELDO SOLOB DALI	EldoLED Solodrive, 0.1% dimming driver for DALI controls
ELDO ECO1	EldoLED Ecodrive, 1% dimming driver for 0-10V controls
ELDO ECO1 DALI	EldoLED Ecodrive, 1% dimming driver for DALI controls




CROSS SECTIONS

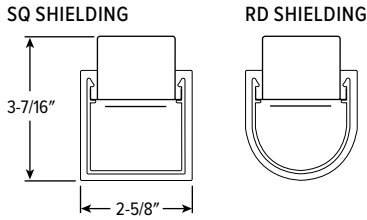


FIXTURE DETAILS

BACKVIEW

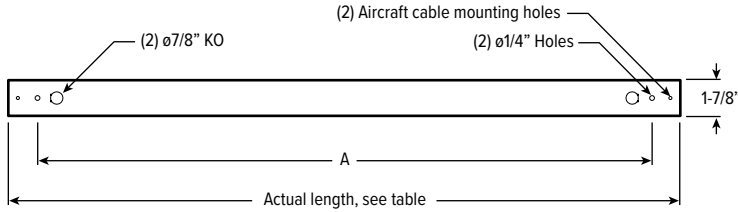


NOMINAL LENGTH	ACTUAL LENGTH	A
2'	24-5/16"	23-5/16"
4'	46-7/16"	45-7/16"
8'	92-15/16"	91-15/16"

ROW ALIGNER DETAIL




SUSPENDED MOUNTING DETAILS

STANDARD HARDWARE (Grid and Hardpan)



- Fixtures are provided with adjustable length aircraft cables and mounting hardware, must specify.
- Electrical supply is brought into the feeder fixture, either as part of a row or as a stand-alone unit. Joiner fixtures complete the row.
- The feeder kits are standard with a 5" canopy to cover the junction box and a 2" canopy at the non-feed point. No J-box is required at non-feed points.

CENTER-TO-CENTER MOUNTING CABLE DETAIL

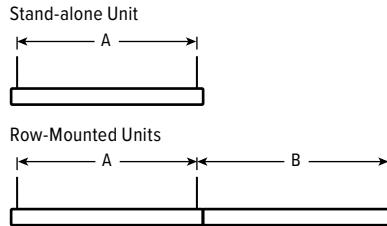


	CABLE MOUNT	
	A	B
2'	23-1/4"	24-1/4"
4'	45-3/8"	46-3/8"
8'	91-3/4"	92-3/4"

OPTIONS DETAILS (surface mount only)


PS/120 OR PS2/120

(Pull switch, single or two-circuit)





WRS/120

(White rocker switch)




45AMB



FINISH OPTIONS

WHITE BLACK BRONZE NICKEL SILVER ALUMINUM



For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.



OCCUPANCY SENSORS DETAILS

ORDERING EXAMPLE: OCCWS FSP-211 - L2 - 120/277

FEATURES

- Fully adjustable high and low dimmed light levels.
- Designed for LED fixtures; rated for up to 200,000 on/off cycles.
- Hold-off setpoint with automatic calibration option for convenience and added energy savings.
- Adjustable via handheld wireless configuration tool (FSIR-100, ordered separately).
- Adjustable time delay and cutoff delay.
- Factory set to 10% dimming at 5 minutes, cutoff at 1 hour.

REMOTE CONTROLLER



FSIR-100 Remote controller for occupancy sensor (specify quantity per project)

Initial setup and subsequent sensor adjustments are made using a handheld configuration tool (FSIR-100). The wireless tool stores up to five sensor parameter profiles to speed configuration of multiple sensors. Please specify quantity required per project.

Visit www.wattstopper.com for more information.

LENS COVERAGE PATTERNS

L2 Coverage at 8' mounting height: $\phi 48'$

