

WET LOCATION LED EXIT SIGN

EXIT/WET

LED

CATALOG #: _____ TYPE: _____

PROJECT: _____


NOTES: _____

EXAMPLE → **EXIT/WET - R - WHT - AC - OPTIONS**

SERIES LETTER COLOR HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES



CROSS SECTIONS

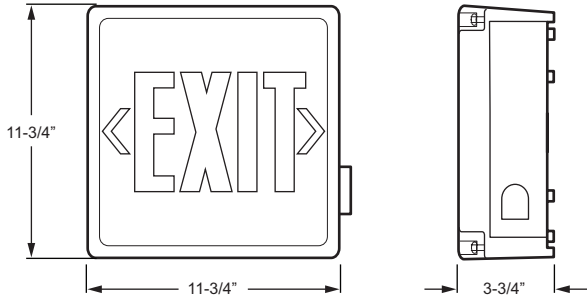

ORDERING INFORMATION

SERIES
EXIT/WET Wet Location LED Exit Sign

LETTER COLOR (Must specify)
R Red
G Green

HOUSING COLOR (Must specify)
WHT Industry-standard white

POWER OPTIONS (Must specify)
AC AC operation
EM AC operation with emergency battery backup

OPTIONS
HTR Internal heater, -10°C - 40°C operation (EM only)
SALIDA Salida faceplate, contact factory for options
SV_ Special voltage, consult factory for options

ACCESSORIES (Shipped separately)
 See back for details.
PC2 Polycarbonate shield
WG Wireguard

FEATURES

- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Wet location listed.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Corrosion-resistant enclosure with engineering grade silicone gasket.
- ▶ Removable directional indicators.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.



LED

SPECIFICATIONS

Housing – 5VA flame retardant, UV-stabilized polycarbonate. High-impact resistant, UV-stabilized polycarbonate clear lens.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Wall mount. Top and side knockout for conduit feed applications.


Labels – Listed to UL 924 standard as an exit light suitable for wet locations (10°C - 40°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/WET	5.4	5.4	0.045	0.019
EXIT/WET (HTR)	17.4	17.4	0.145	0.063

ACCESSORIES

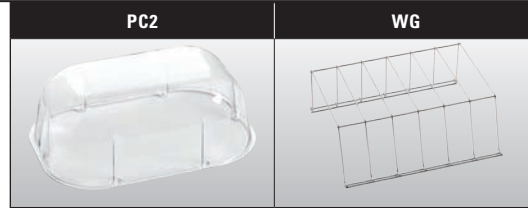

FIXTURE DETAILS

BOLT CIRCLE PATTERN

