

NEW YORK CITY-APPROVED CAST ALUMINUM LED EXIT

EXIT/CA/NYC

CATALOG #:	TYPE:
PROJECT:	NOTES:


LED



EXAMPLE → **EXIT/CA/NYC - AF - BLK - AC - OPTIONS - D**

SERIES FACEPLATE FINISH HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES VOLTAGE

CROSS SECTIONS

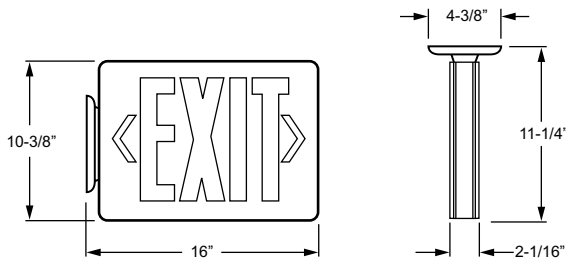

ORDERING INFORMATION

SERIES		POWER OPTIONS	
EXIT/CA/NYC	New York City-Approved Cast Aluminum LED Exit	AC	AC operation
		EM	AC operation with emergency battery backup
FACEPLATE FINISH		OPTIONS	
AF	Brushed aluminum faceplate	DC	Dual circuit (AC only)
BF	Black faceplate	SDT	Self-diagnostic test (EM only)
WF	Industry-standard white faceplate		
HOUSING COLOR		ACCESSORIES (Shipped separately)	
BLK	Black	See back for details.	
BA	Brushed aluminum	PC2	Polycarbonate shield
WHT	Industry-standard white	WG/COMBO	Wireguard
		VOLTAGE	
		D	120V or 277V

FEATURES

- ▶ New York City-approved 8" tall red letters.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red.
- ▶ Available as a full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Compact, low profile design.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Removable directional indicators.
- ▶ Unique design allows double face conversion in the field.
- ▶ Quick-snap face plate closure.



LED

SPECIFICATIONS

Housing – Premium-grade, aluminum housing
Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Aluminum mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.


Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/CA/NYC-EM	5.0	5.0	0.041	0.018

ACCESSORIES

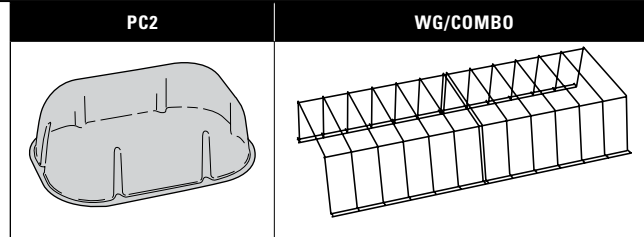

BOLD CIRCLE PATTERN

