


Shown with lamps, not included

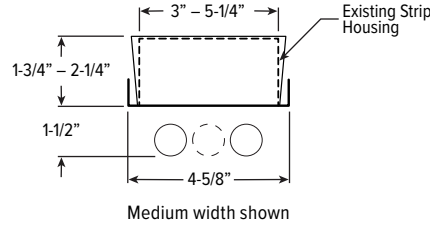

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Quickly upgrade existing fluorescent strips to energy-efficient TLED ready fixtures
- Simple installation does not require tools
- TLED fixtures provide on-site lamping flexibility
- Fits any 3" – 5-1/4" wide existing strip housing. Additional widths available, consult factory
- Made Right Here™ in the USA

SPECIFICATIONS

- HOUSING** – Provided by others, must be 3" – 5-1/4" wide.
- WIREWAY COVER** – 22-gauge die-formed C.R.S.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, LED tubes, lamps by others.
- MOUNTING** – Toolless mounting brackets attach to existing strip channels from 3" – 5-1/4" wide.
- LISTINGS** – CCSAUS certified as luminaire fittings - retrofit kits for luminaires suitable for dry or damp locations.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: SRK - M - 4 - 24T5LD/B - OPTIONS - UNV

ORDERING INFO

SERIES	NOM. WIDTH	NOM. LENGTH	TOTAL LAMPS ⁽¹⁾	LAMP SIZE	WIRING	LAMP TYPE
SRK	N 1-lamp	4 4'	T5 Fixtures	4T5L 4' T5 LED tube	S Single end	B Type B
	M 1, 2, or 3-lamp	8 8' ⁽²⁾	1, 2, 3, 4, or 6	4T8L 4' T8 LED tube	D Double end	
	W 1, 2, or 3-lamp		T8 Fixtures			
			1, 2, 3, 4, or 6			

OPTIONS

(H_)	Additional housing heights available, must specify:
25	>2-1/4 – 2-3/4
30	>2-3/4 – 3-1/4
35	>3-1/4 – 3-3/4

VOLTAGE


UNV 120-277V

NOTES

- 1-2-, or 3-lamp cross-sections.
- 2 Two 4' wireway covers.




FIXTURE DETAILS

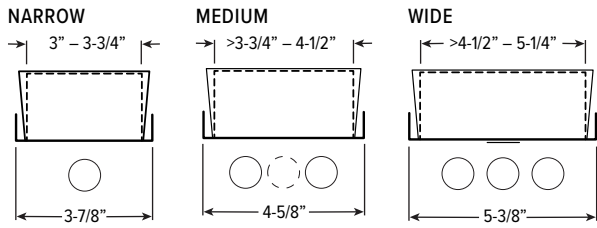

MOUNTING DETAILS


MOUNTING BRACKET LOCATIONS

4' FIXTURE

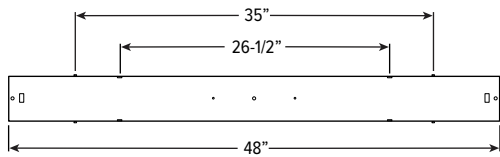

MOUNTING BRACKET LOCATIONS

8' FIXTURE

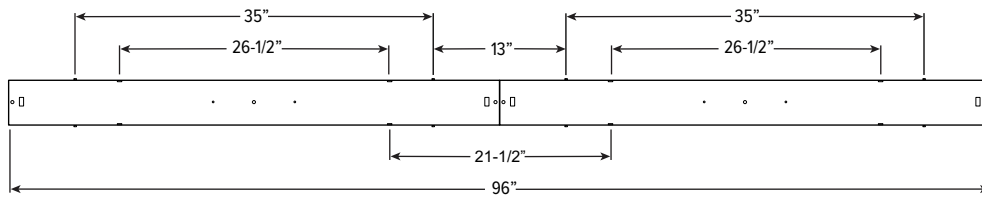

BRACKET INSTALLATION

